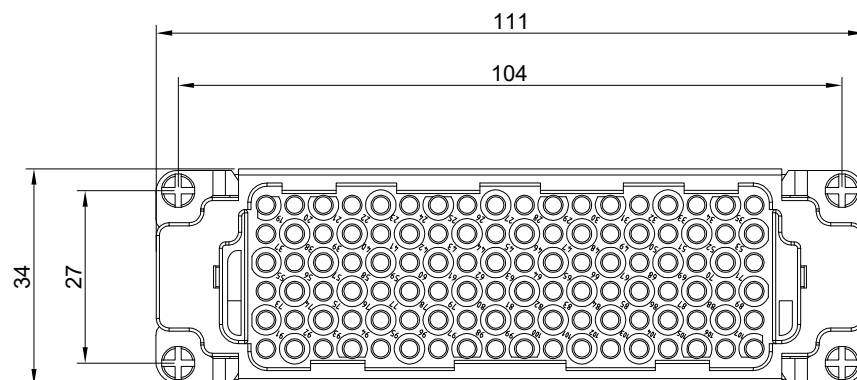
**Technical characteristics:****Specifications**

DIN EN 60 664-1

DIN EN 61 984

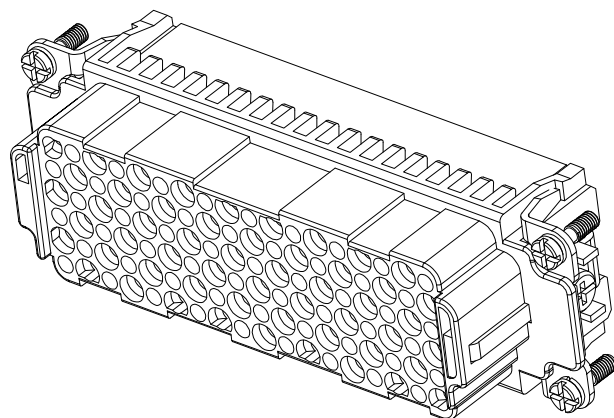
Inserts

1. Number of contacts:108+PE
2. Rated Current:10A
3. Rated Voltage:250V
4. Pollution degree:3
5. Rated impulse voltage:4KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material:Polycarbonate
8. Rated voltage acc. to UL/CSA:600V
9. Limiting temperatures:-40℃~+125℃
10. Flammability acc. to UL94:V0
11. Mechanical working life(mating cycles): ≥ 500

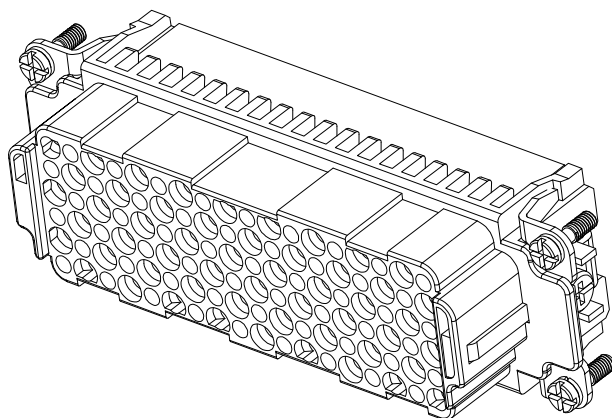
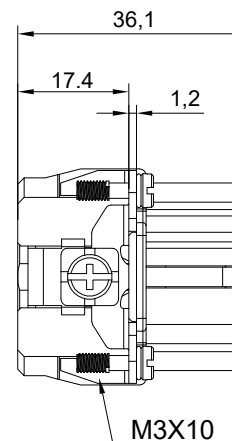
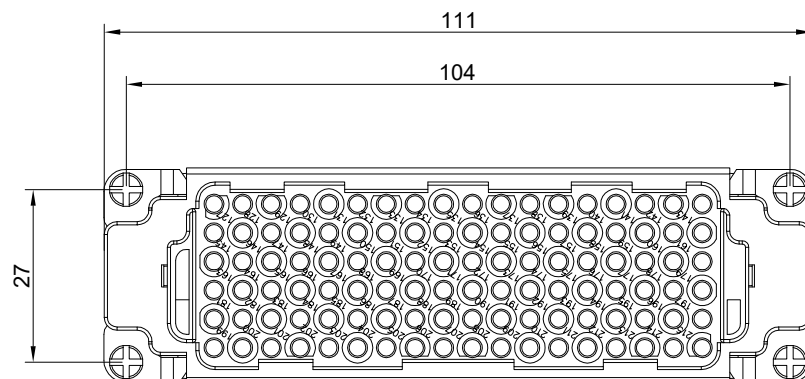
Contacts

1. Material:Copper alloy
2. Surface:hard-silver plated
3. Contact resistance: $\leq 3m \Omega$
4. Terminal:Crimp terminal
5. Wire gauge:0.14-2.5mm² (26-14AWG)
6. Stripping length:6-8mm
7. Rohs Compliance

Note:Crimp contact pins should
order separately



ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.24	UNITS	MM	SHEET/OF	1 / 2	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE						
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME	ULO-HD05-HDD-216-FC			
				DWGNO.				

**Technical characteristics:****Specifications**

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts:108+PE
2. Rated Current:10A
3. Rated Voltage:250V
4. Pollution degree:3
5. Rated impulse voltage:4KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material:Polycarbonate
8. Rated voltage acc. to UL/CSA:600V
9. Limiting temperatures:-40℃~+125℃
10. Flammability acc. to UL94:V0
11. Mechanical working life(mating cycles): ≥ 500

Contacts

1. Material:Copper alloy
2. Surface:hard-silver plated
3. Contact resistance: $\leq 3m\Omega$
4. Terminal:Crimp terminal
5. Wire gauge:0.14-2.5mm² (26-14AWG)
6. Stripping length:6-8mm
7. Rohs Compliance

Note:Crimp contact pins should
order separately

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.24	UNITS	MM	SHEET/OF		2/ 2
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE						
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME	ULO-HD05-HDD-216-FC			
				DWGNO.				