
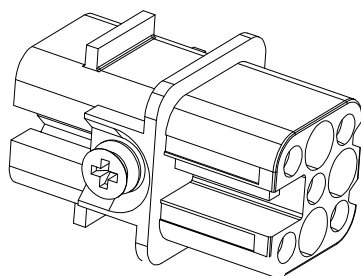
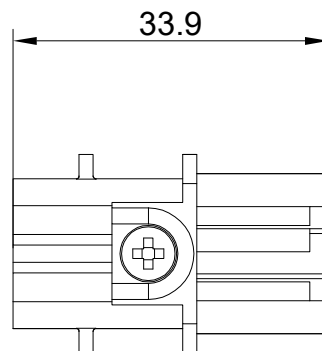


FILE: 2023-D01\ULO

REV		E.C.N NO.	CONTENT	CHK	DATE

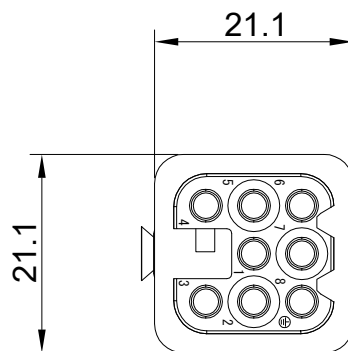

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

- 1.Number of contacts:8
- 2.Rated Current:10A
- 3.Rated Voltage:~50V/-120V
- 4.Pollution degree:3
- 5.Rated impulse voltage:0.8KV
- 6.Insulation resistance: $\geq 10^{10} \Omega$
- 7.Material:Polycarbonate
- 8.Rated voltage acc. to UL/CSA:50V
- 9.Rated voltage(direct voltage):120V
- 10.Limiting temperatures:-40℃~+125℃
- 11.Flammability acc. to UL94:V0
- 12.Mechanical working life(mating cycles): ≥ 500

Contacts

- 1.Material:Copper alloy
- 2.Surface:hard-silver plated
- 3.Contact resistance: $\leq 3m \Omega$
- 4.Terminal:Crimp terminal
- 5.Wire gauge:0.14-2.5mm² (26-14AWG)
- 6.Stripping length:6-8mm
- 7.Rohs Compliance

Note:Crimp contact pins should order separately

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.22	UNITS	MM	SHEET/OF	1 / 1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE		NAME	ULO-HD04-HD-008-FC			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								