
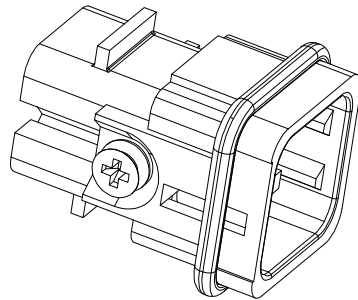
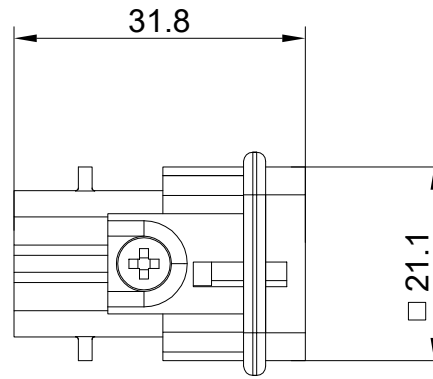


REV	E.C.N NO.	CONTENT	CHK	DATE



Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts: 8
2. Rated Current: 10A
3. Rated Voltage: $\sim 50V/-120V$
4. Pollution degree: 3
5. Rated impulse voltage: 0.8KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material: Polycarbonate
8. Rated voltage acc. to UL/CSA: 50V
9. Rated voltage (direct voltage): 120V
10. Limiting temperatures: $-40^{\circ}C \sim +125^{\circ}C$
11. Flammability acc. to UL94: V0
12. Mechanical working life (mating cycles): ≥ 500

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 3m \Omega$
4. Terminal: Crimp terminal
5. Wire gauge: 0.14-2.5mm² (26-14AWG)
6. Stripping length: 6-8mm
7. RoHS Compliance

Note: Crimp contact pins should
order separately

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE				
DWG.	LZM	DATE	23.11.22	UNITS	MM	SHEET/OF	1 / 1				
CHK.		DATE		SCALE	1 : 1	A4					
APP.		DATE									
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME					ULO-HD04-HD-008-MC		
				DWGNO.							