
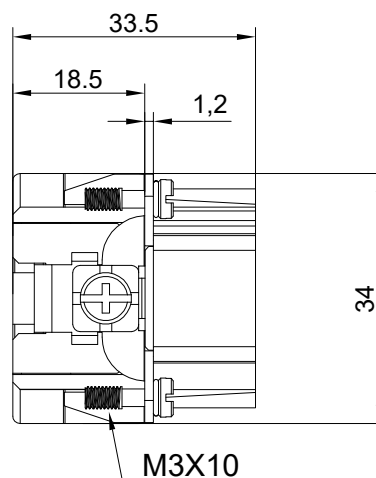


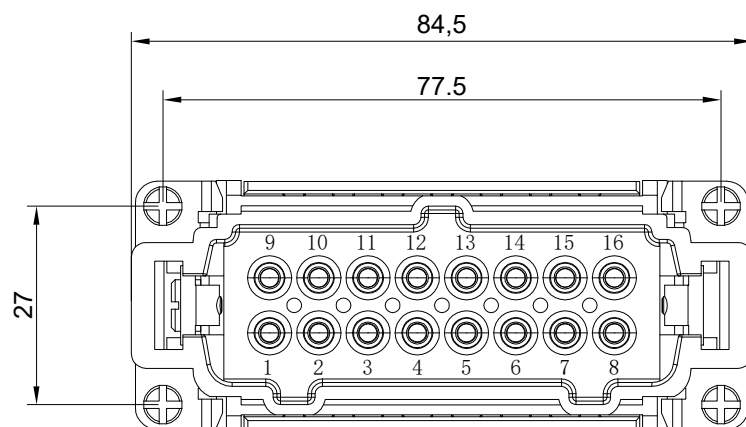

Technical characteristics:



Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts: 16+PE
2. Rated Current: 16A
3. Rated Voltage: 500V
4. Pollution degree: 3
5. Rated impulse voltage: 6KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material: Polycarbonate
8. Rated voltage acc. to UL/CSA: 600V
9. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
10. Flammability acc. to UL94: V0
11. Mechanical working life (mating cycles): ≥ 500

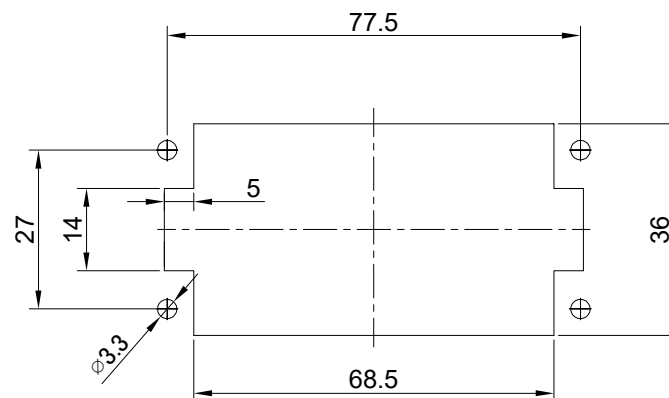
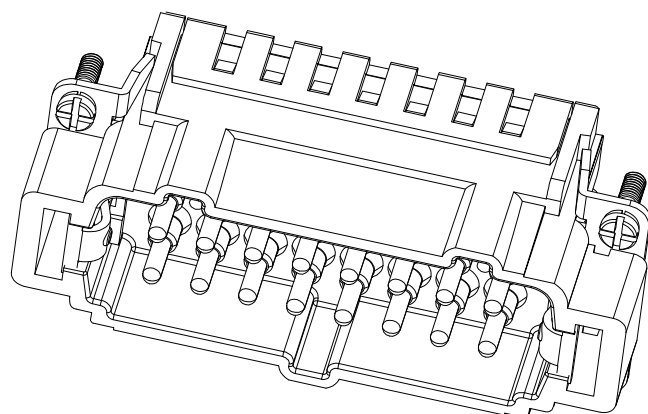


面板安装开孔图

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 3\text{m} \Omega$
4. Terminal: Cage-clamp
5. Wire gauge: 0.14-2.5mm² (26-14AWG)
6. Stripping length: 7.0-9.0mm
7. RoHS Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 23.11.08	UNITS	MM	SHEET/OF 1 / 2
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD.			NAME	ULO-HD02-HE-032-MS	
宁波欧路电子有限公司			DWGNO.		

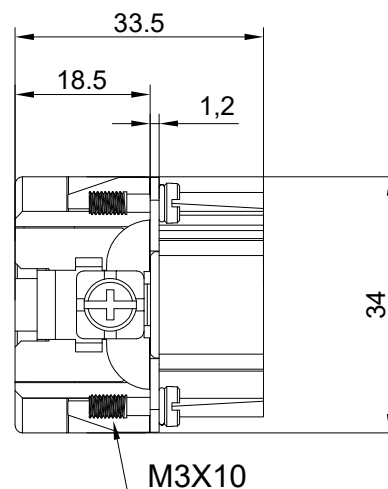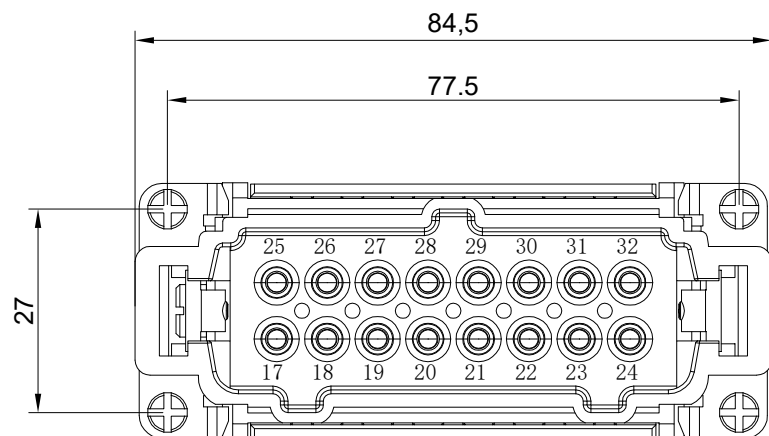

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts: 16+PE

2. Rated Current: 16A

3. Rated Voltage: 500V

4. Pollution degree: 3

5. Rated impulse voltage: 6KV



6. Insulation resistance: $\geq 10^{10} \Omega$

7. Material: Polycarbonate

8. Rated voltage acc. to UL/CSA: 600V

9. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

10. Flammability acc. to UL94: V0

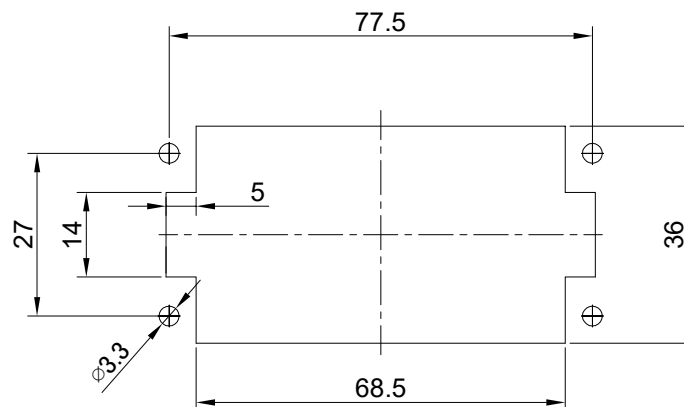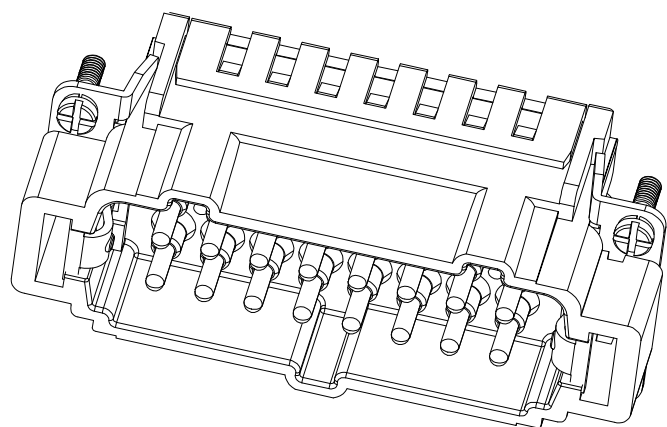11. Mechanical working life (mating cycles): ≥ 500 

面板安装开孔图

Contacts

1. Material: Copper alloy

2. Surface: hard-silver plated

3. Contact resistance: $\leq 3\text{m} \Omega$

4. Terminal: Cage-clamp

5. Wire gauge: 0.14-2.5mm² (26-14AWG)

6. Stripping length: 7.0-9.0mm

7. Rohs Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 23.11.08	UNITS	MM	SHEET/OF 2/2
CHK.		DATE	SCALE	1:1	A4
APP.		DATE	NAME	ULO-HD02-HE-032-MS	
			DWGNO.		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司