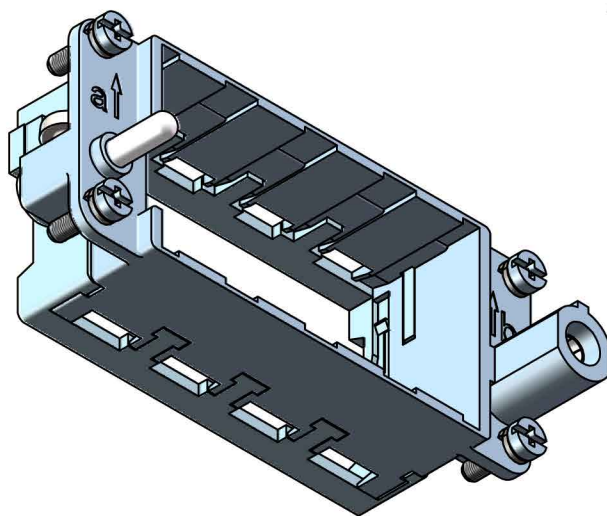
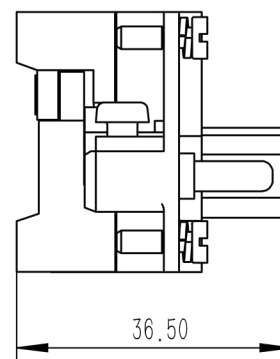
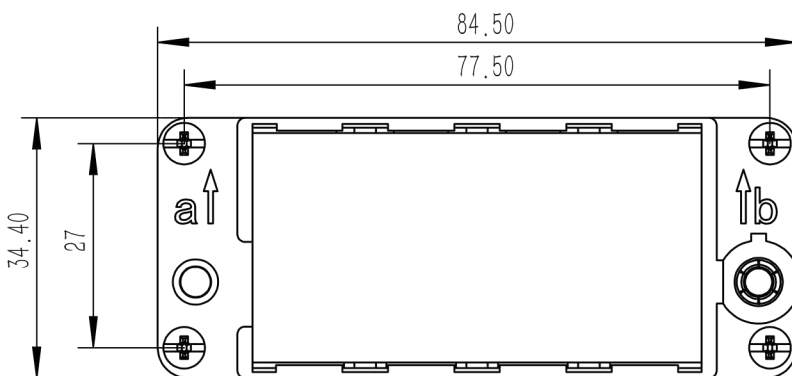


技术参数:

- 模块数量: 4

- 接地线:

· 功率线: 4-10mm²(12-8 AWG)

· 信号线: 1-2.5mm²(18-14 AWG)

- 材料: 压铸铝

- 温度范围: -40℃ - +125℃

- 可插拔次数: >500

Technical specification:

- No. of module: 4

- Wire gauge(PE contact):


· Power side: 4-10mm²(12-8 AWG)

· Signal side: 1-2.5mm²(18-14 AWG)

- Material: zinc die-cast

- Temperature range: -40℃ - +125℃

- Mating cycles: >500

 			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0	81.7g	1:1	SO-HF16B-NLA3
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			