
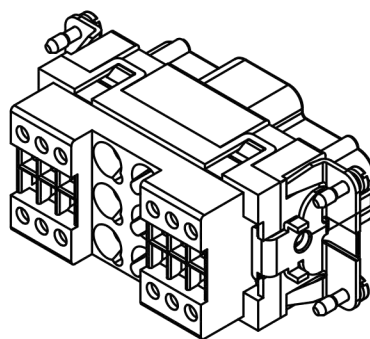
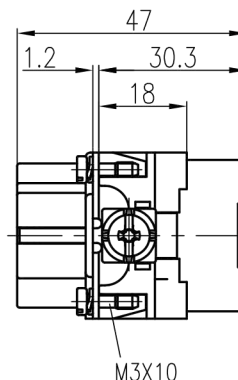


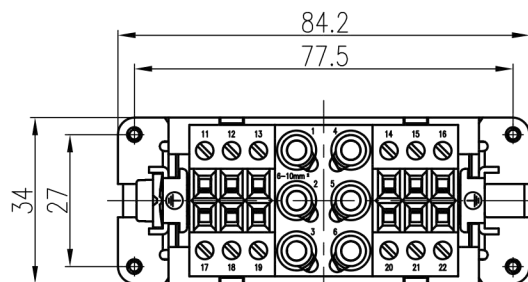

技术参数:

插芯:

- 插针数: 6/12+PE

- 额定电流:

- 电力区: 40A
- 信号区: 10A

- 额定电压:

- 电力区: 690V
- 信号区: 230V/400V

- 额定脉冲电压:

- 电力区: 6kV
- 信号区: 4kV

- 污染等级: 3

- 绝缘阻抗: $>10^{10}\Omega$

- 材料: 聚碳酸酯

- 颜色: RAL 7032 (浅灰色)

- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$

- 依据UL 94的阻燃等级: V0

- 可插拔次数: >500

插针:

- 接线方式: 轴向螺栓连接

- 材料: 铜合金

- 表面处理: 镀银

- 接触电阻:

- 强电针: $<0.5\text{m}\Omega$
- 信号针: $<3\text{m}\Omega$

- 线径范围:

- 强电针: 6-10mm²
- 信号针: 0.2-2.5mm²(24-14 AWG)

- 最大绝缘直径:

- 强电针: 6.1mm

- 拧紧力矩:

- 强电针:
mm²: 2.5 4 6 10
N·m: 1.5 1.5 2 2
· 信号针: 0.8N·m

- 剥线长度:

- 强电针:
mm²: 2.5 4 6 10
mm: 5^{±1} 5^{±1} 8^{±1} 8^{±1}
· 信号针: 7.5mm

- 工具:

- 内角扳手: SW-2*40

Technical specification:

Insters:

- No. of contact: 6/12+PE

- Rated current:

- Power area: 40A
- Signal area: 10A

- Rated voltage:

- Power area: 690V
- Signal area: 230V/400V

- Rated impulse voltage:

- Power area: 6kV
- Signal area: 4kV

- Pollution degree: 3

- Insulation resistance: $>10^{10}\Omega$

- Material: polycarbonate

- Colour: RAL 7032(light grey)

- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$

- Flammability acc.to UL 94: V0

- Mating cycles: >500

Contacts:

- Terminal: axial screw terminal

- Material: copper alloy

- Surface: hard-silver plated

- Contact resistance:

- Power contacts: $<0.5\text{m}\Omega$
- Signal contacts: $<3\text{m}\Omega$

- Wire gauge:

- Power contacts: 6-10mm²
- Signal contacts: 0.2-2.5mm²(24-14 AWG)

- Max. insulation diameter: 6.1mm

- Tightening torque:


- Power contacts:
mm²: 2.5 4 6 10
N·m: 1.5 1.5 2 2
· Signal contacts: 0.8N·m

- Stripping length:

- Power contacts:
mm²: 2.5 4 6 10
mm: 5^{±1} 5^{±1} 8^{±1} 8^{±1}
· Signal contacts: 7.5mm

- Tools:

- Hexagonal driver: SW-2*40

			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0		1:1	SO-HK-006.2/12-F
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			