
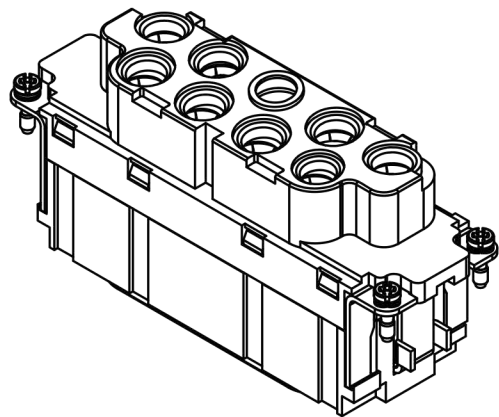
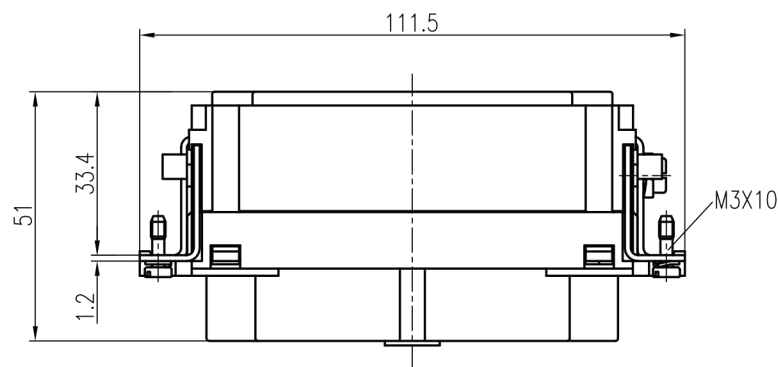


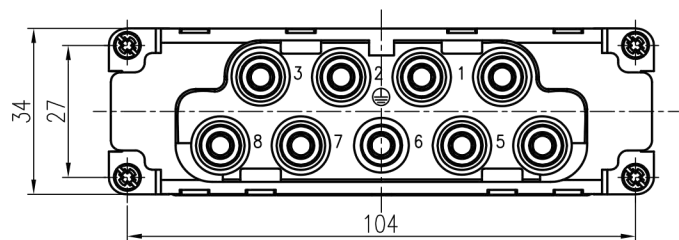

技术参数:

插芯:

- 插针数: 8/0+PE
- 额定电流: 100A
- 额定电压: 690V
- 额定脉冲电压: 8kV
- 污染等级: 3
- 依据UL额定电压: 600V
- 依据UL额定电流: 82A
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

插针:

- 接线方式: 轴向螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $<0.5\text{m}\Omega$
- 线径范围: $10-25\text{mm}^2(7-3\text{ AWG})$
- 最大绝缘直径: 11.4mm
- 拧紧力矩:
 - mm^2 : 10 16 25
 - N·m: 6 6 7
- 剥线长度: $13^{\pm1}$
- 工具:
 - 内角扳手: SW-4*100



Technical specification:

Insters:

- No. of contact: 8/0+PE
- Rated current: 100A
- Rated voltage: 690V
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Rated current acc.to UL: 82A
- Insulation resistance: $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: >500

Contacts:

- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $<0.5\text{m}\Omega$
- Wire gauge: $10-25\text{mm}^2(7-3\text{ AWG})$
- Max. insulation diameter: 11.4mm
- Tightening torque:
 - mm^2 : 10 16 25
 - N·m: 6 6 7
- Stripping length: $13^{\pm1}$
- Tools:
 - Hexagonal driver: SW-4*100

 			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0		1:1	SO-HK-008/0-F
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			