
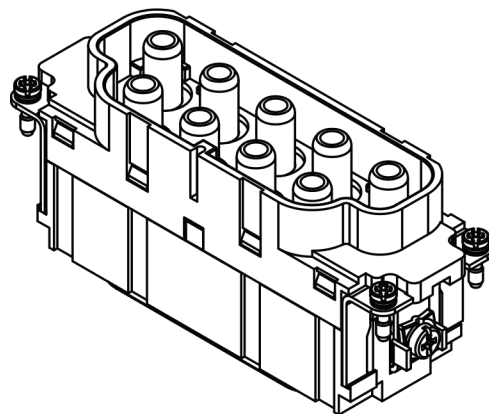
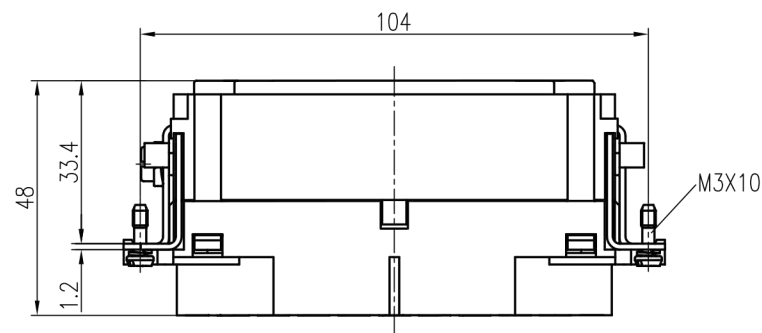


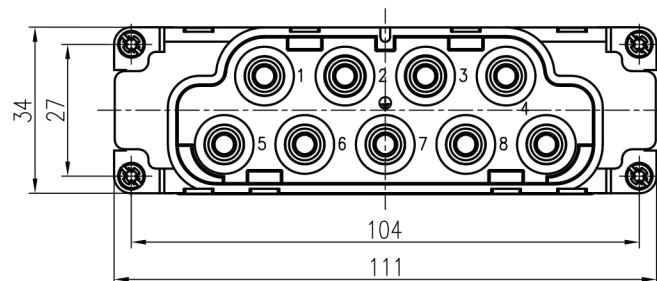

技术参数:

插芯:

- 插针数: 8/0+PE
- 额定电流: 100A
- 额定电压: 690V
- 额定脉冲电压: 8kV
- 污染等级: 3
- 依据UL额定电压: 600V
- 依据UL额定电流: 82A
- 绝缘阻抗: $\geq 10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 轴向螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: $\leq 0.5\text{m}\Omega$
- 线径范围: 10-25mm²(7-3 AWG)
- 最大绝缘直径: 11.4mm
- 拧紧力矩:
 - mm²: 10 16 25
 - N·m: 6 6 7
- 剥线长度: 13 $\pm$ 1
- 工具:
 - 内角扳手: SW-4*100



Technical specification:

Insters:

- No. of contact: 8/0+PE
- Rated current: 100A
- Rated voltage: 690V
- Rated impulse voltage: 8kV
- Pollution degree: 3
- Rated voltage acc.to UL: 600V
- Rated current acc.to UL: 82A
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

Contacts:

- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: $\leq 0.5\text{m}\Omega$
- Wire gauge: 10-25mm²(7-3 AWG)
- Max. insulation diameter: 11.4mm
- Tightening torque:
 - mm²: 10 16 25
 - N·m: 6 6 7
- Stripping length: 13 $\pm$ 1
- Tools:
 - Hexagonal driver: SW-4*100



订货号 Order No.

版本
REV

重量
weight

比例
Scale

产品代号 Part Code

V1.0

1:1

SO-HK-008/0-M



浙江思美克电气科技有限公司
ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD