
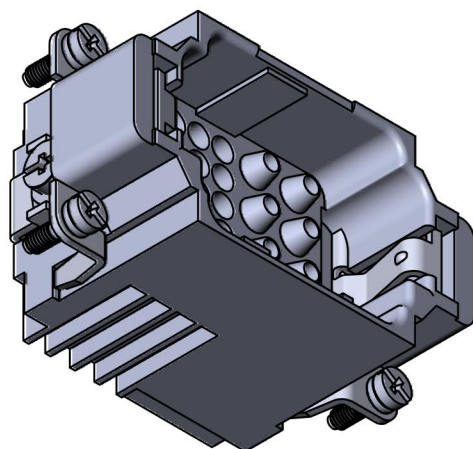
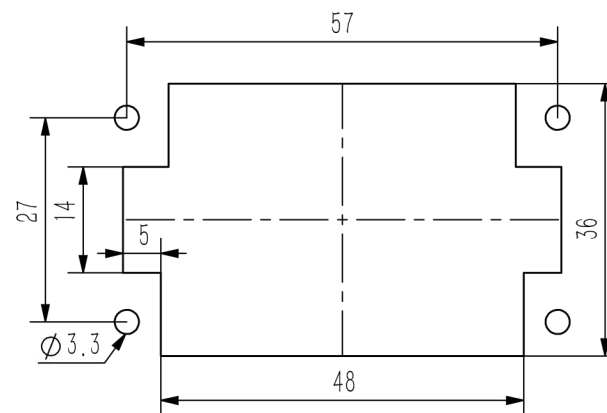


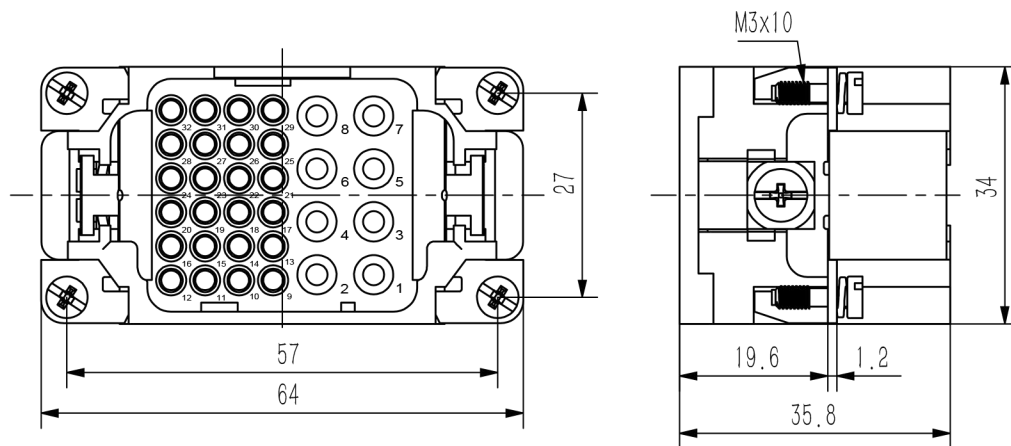

技术参数:

插芯:

- 插针数: 8/24+PE
- 额定电流:
 - 电力区: 16A
 - 信号区: 10A
- 额定电压:
 - 电力区: 400V
 - 信号区: 250V
- 额定脉冲电压:
 - 电力区: 6kV
 - 信号区: 4kV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V/300V
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

插针:

- 接线方式: 冷压连接
- 材料: 铜合金
- 表面处理:
 - 镀银
 - 镀金
- 接触电阻:
 - 强电针: $\leq 1\text{m}\Omega$
 - 信号针: $\leq 3\text{m}\Omega$
- 线径范围:
 - 强电针: $0.5-4\text{mm}^2(20-12\text{ AWG})$
 - 信号针: $0.14-2.5\text{mm}^2(26-14\text{ AWG})$
- 工具:
 - 冷压钳:
 - 退针器:

Technical specification:

Insters:


- No. of contact: 8/24+PE
- Rated current:
 - Power area: 16A
 - Signal area: 10A
- Rated voltage:
 - Power area: 400V
 - Signal area: 250V
- Rated impulse voltage:
 - Power area: 6kV
 - Signal area: 4kV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V/300V
- Insulation resistance: $>10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: >500

Contacts:

- Terminal: crimp terminal
- Material: copper alloy
- Surface:
 - hard-silver plated
 - hard-gold plated
- Contact resistance:
 - Power contacts: $\leq 1\text{m}\Omega$
 - Signal contacts: $\leq 3\text{m}\Omega$
- Wire gauge:
 - Power contacts: $0.5-4\text{mm}^2(20-12\text{ AWG})$
 - Signal contacts: $0.14-2.5\text{mm}^2(26-14\text{ AWG})$

Tools:

- Crimp contact tool:
- Contact removal tool:

 			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0	60g	1:1	SO-HK-008/24-MC
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			