

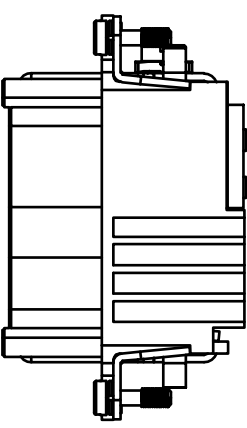


REV		E.C.N NO.	CONTENT	CHK	DATE

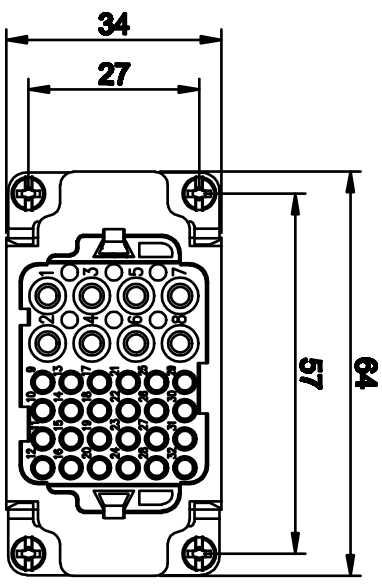


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts: 8/24+PE
2. Rated Current: 16A
3. Rated Voltage: 400V
4. Pollution degree: 3
5. Rated impulse voltage: 6kV
6. Material: Polycarbonate
8. Limiting temperatures: -40°C ~ +125°C
9. Flammability acc. to UL94: V0
10. Mechanical working life (mating cycles): ≥ 500

Signal Area

1. Rated Current: 10A
2. Rated Voltage: 250V
3. Pollution degree: 3
4. Rated voltage acc. to UL/CSA: 600V/300V
5. Rated impulse voltage: 4kV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Terminal: Crimp terminal
8. RoHS Compliance

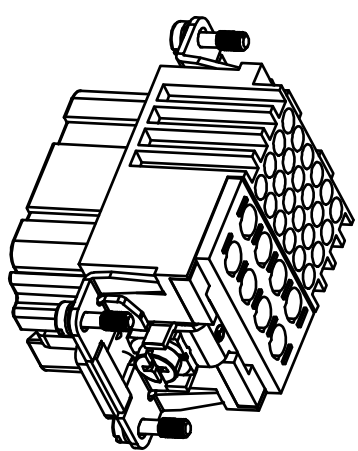

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	S.W.L	DATE	2.3.12.8	MM	SHEET/OF 1 / 1
CHK.	DATE	SCALE	1 : 1	A4	
APP.	DATE	NAME	ULO-HD07-HK-8/24-FC		
 NINGBO ULO ELECTRONICS CO., LTD. 宁波欧路电子有限公司			DWGNO.		