
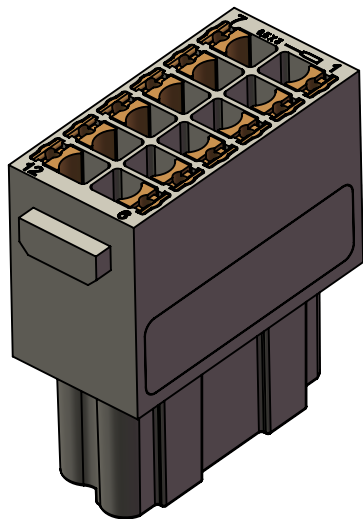
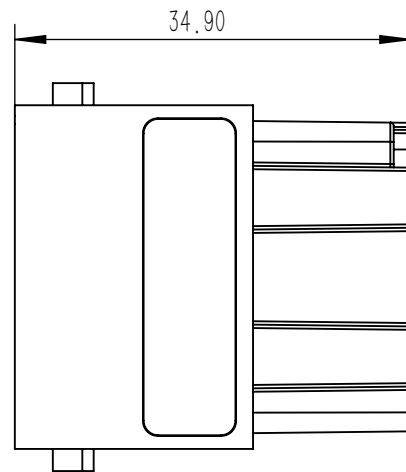


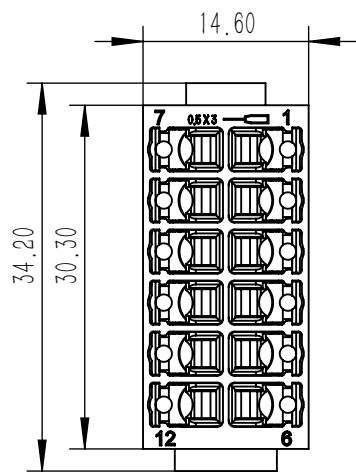

技术参数:

插芯:

- 插针安数: 12
- 额定电流: 10A
- 额定电压: 250V
- 额定脉冲电压: 4KV
- 污染等级: 3
- 依据UL/CSA的额定电压: 250V
- 绝缘阻抗: $\geq 10^{10} \Omega$

- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: ≥ 500

插针:

- 接线方式: 弹片连接 (快接)
- 材料: 铜合金
- 表面处理:

- 镀银
- 镀金

- 接触电阻: $\leq 3\text{m}\Omega$

- 线径范围: $0.5-2.5\text{mm}^2$ (20-14 AWG)

Technical specification :



Insters :

- No.of contact : 12
- Rated current : **10A**
- Rated voltage : **250V**
- Rated impulse voltage : **4KV**
- Pollution degree : **3**
- Rated voltage acc.to UL/CSA : **250V**
- Insulation resistance : $\geq 10^{10} \Omega$

- Material:polycarbonate
- Colour : **RAL 7032** (light grey)
- Temperature range : $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Flammability acc.to UL 94 : **V0**
- Mating cycles : **≥ 500**

Contacts :

- Terminal : Shrapnel connection (Snap)
- Msterial : copper alloy
- Surface :
 - hard-silver plated
 - hard-gold plated
- Contact resistance : $\leq 3\text{m}\Omega$
- Wire gauge : $0.5-2.5\text{mm}^2$ (20-14 AWG)



订货号 Order No.

版本
REV

重量
weight

比例
Scale

产品代号 Part Code

V1.0

24g

1.5:1

SO-HMD-012-FQ



SMICO

浙江思美克电气科技有限公司

ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD