


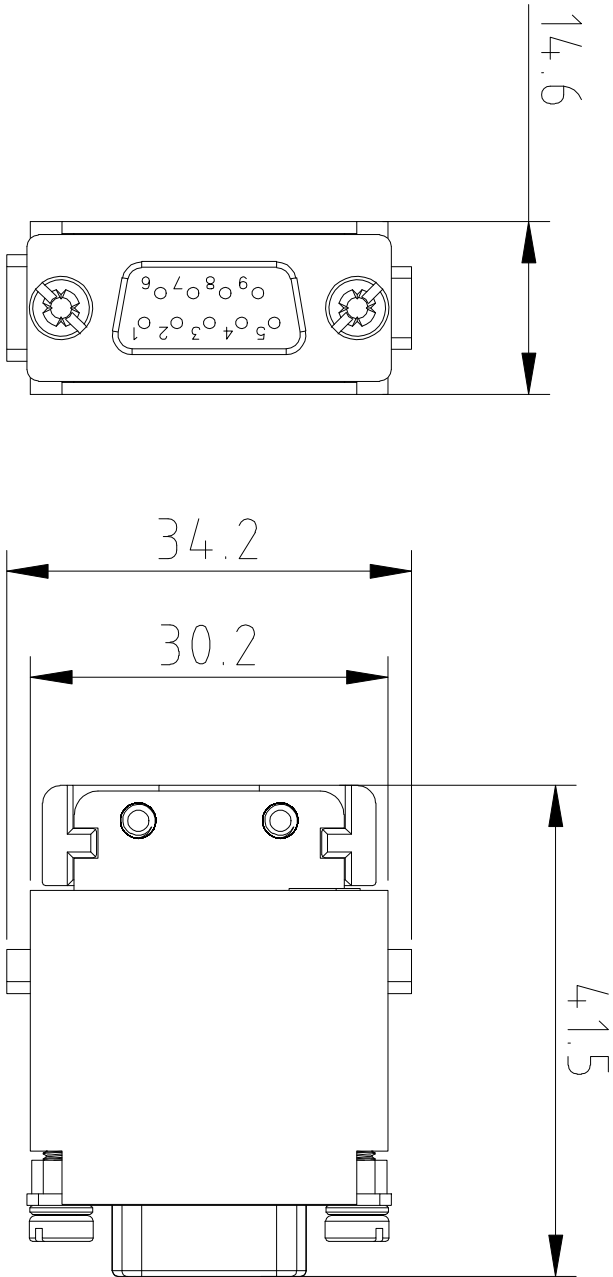

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts:9
2. Rated Current:5A
3. Rated Voltage:50V
4. Pollution degree:3
5. Rated impulse voltage:0.8KV
6. Insulation resistance: $\geq 10^9 \Omega$
7. Material:Polycarbonate
8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
9. Flammability acc. to UL94: V0
10. Mechanical working life(mating cycles) : ≥ 500
11. Terminal:Crimp terminal
12. Rohs Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	UL0-HD09-EMDS-009-FC		



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.