



14.6

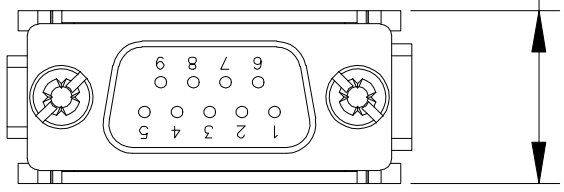

34.2

30.2


41.5

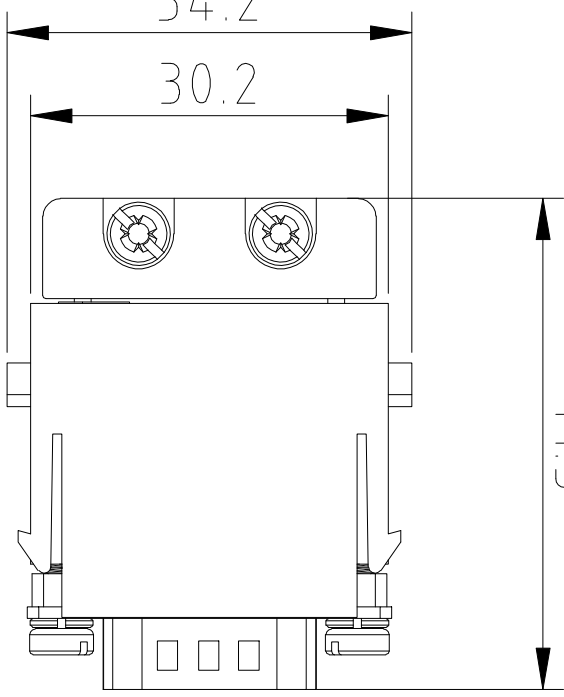

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 9
- 2. Rated Current: 5A
- 3. Rated Voltage: 50V
- 4. Pollution degree: 3
- 5. Rated impulse voltage: 0.8KV
- 6. Insulation resistance: $\geq 10^9 \Omega$
- 7. Material: Polycarbonate
- 8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 9. Flammability acc. to UL94: V0
- 10. Mechanical working life (mating cycles): ≥ 500
- 11. Terminal: Crimp terminal
- 12. Rohs Compliance

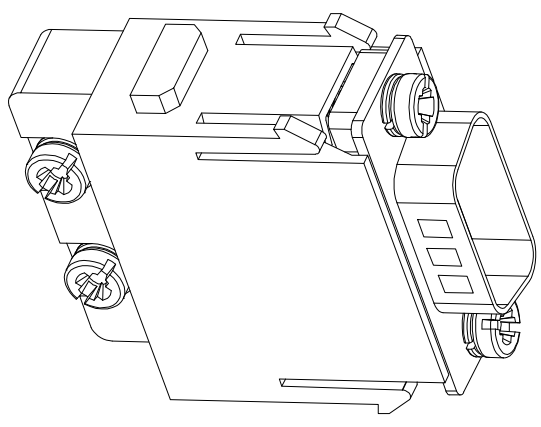

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	A4
APP.		DATE		NAME	UL0-FHD09-FHDS-009-MC
				DWGNO.	



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

UL0-FHD09-FHDS-009-MC