
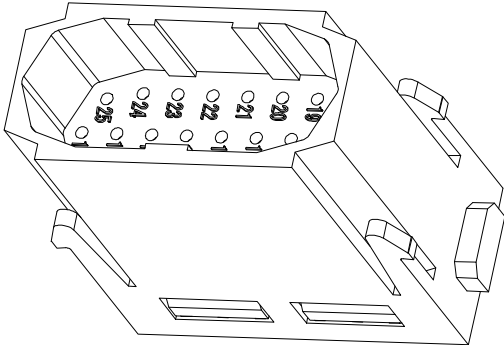
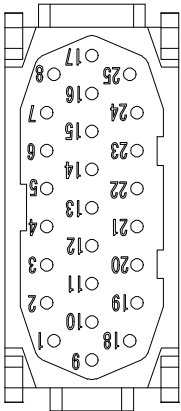
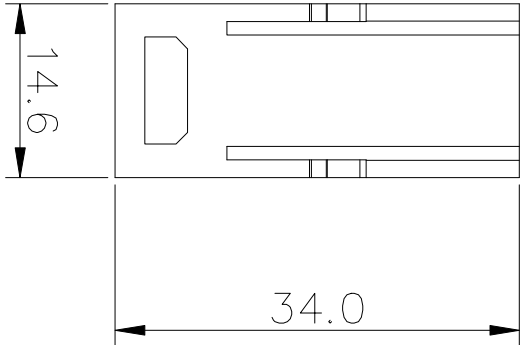


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 25
- 2. Rated Current: 4A
- 3. Rated Voltage: 50V
- 4. Pollution degree: 3
- 5. Rated impulse voltage: 0.8KV
- 6. Insulation resistance: $\geq 10^{10} \Omega$
- 7. Material: Polycarbonate
- 8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 9. Flammability acc. to UL94: V0
- 10. Mechanical working life (mating cycles): ≥ 500
- 11. Terminal: Crimp terminal
- 12. Rohs Compliance

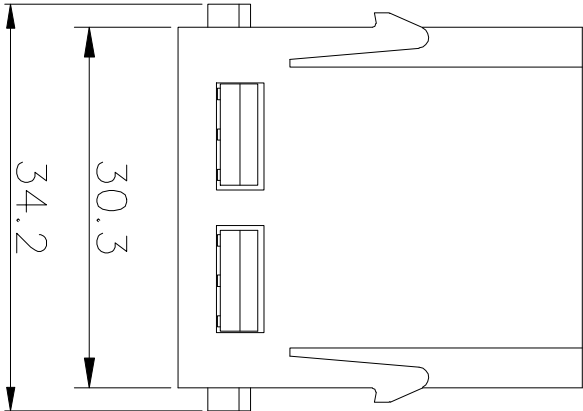

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE		SCALE	1:1	SHEET/OF
APP.	DATE			A4	1/1
NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					UL0-HD09-HMDS-025-MC
DWGNO.					