
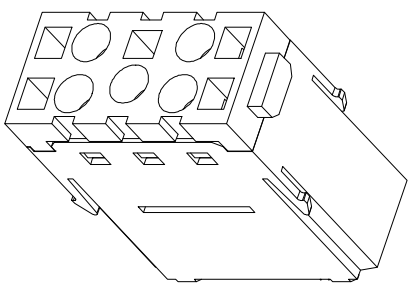


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts:5
- 2. Rated Current:16A
- 3. Rated Voltage:500V
- 4. Pollution degree:3
- 5. Rated impulse voltage:6KV
- 6. Rated voltage acc. to UL/CSA:600V
- 7. Insulation resistance: $\geq 10^{10} \Omega$
- 8. Material:Polycarbonate
- 9. Limiting temperatures: -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life(mating cycles) : ≥ 500
- 12. Terminal:Cage clamp terminal
- 13. Rohs Compliance

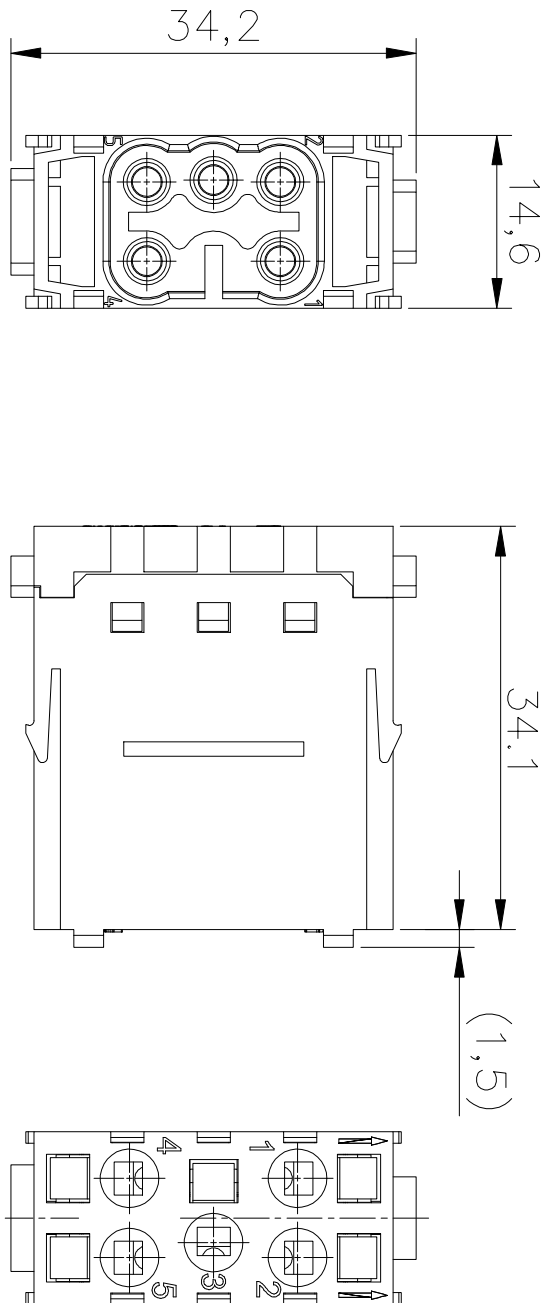

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE			SCALE 1:1	A4
APP.	DATE				
NINGBO UL0 ELECTRONICS CO.,LTD.				NAME	UL0-HD09-TIME-005-MS
 宁波欧路电子有限公司				DWGNO.	