



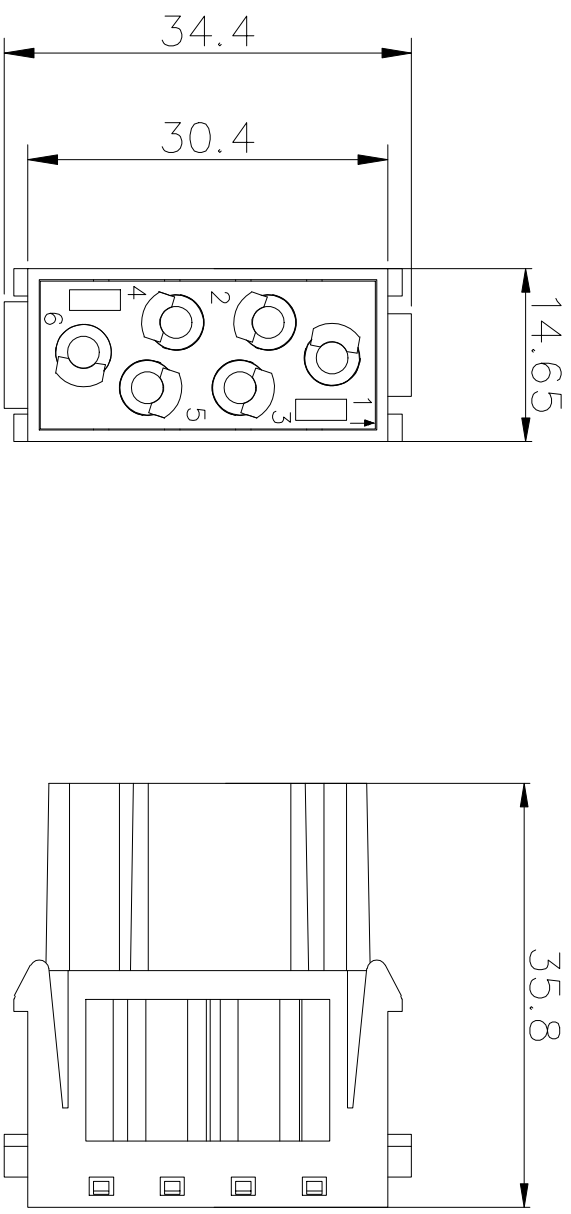

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts:6
2. Rated Current:16A
3. Rated Voltage:500V
4. Pollution degree:3
5. Rated impulse voltage:6KV
6. Insulation resistance: $\geq 10^{10} \Omega$
7. Material:Polycarbonate
8. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
9. Flammability acc. to UL94: V0
10. Mechanical working life(mating cycles) : ≥ 500
11. Terminal:Crimp terminal
12. Rohs Compliance

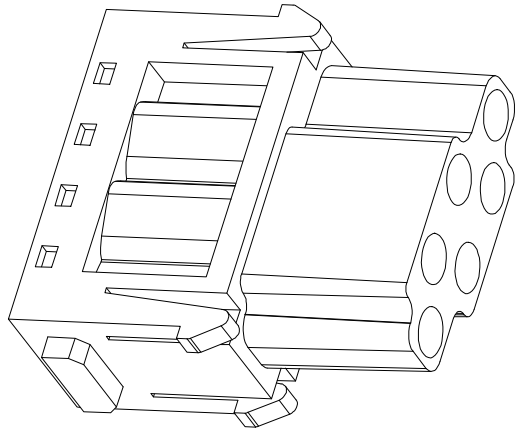

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE		
DWG.	SWL		DATE		2023.12.9		UNITS	MM	SHEET/OF	1/1
CHK.			DATE				SCALE	1:1	A4	
APP.			DATE				UL0-HD09-FME-006-FC			
NAME										
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司							DWGNO.			