
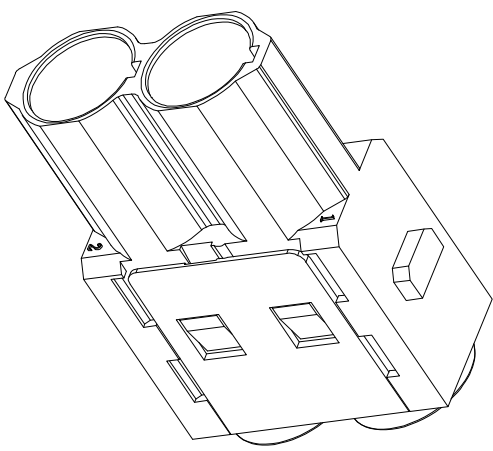


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts:2
- 2. Rated Current:70A
- 3. Rated Voltage:1000V
- 4. Pollution degree:3
- 5. Rated impulse voltage:8KV
- 6. Insulation resistance:≥10¹⁰Ω
- 7. Material:Polycarbonate
- 8. Limiting temperatures:-40℃~+125℃
- 9. Flammability acc. to UL94:V0
- 10. Mechanical working life(mating cycles) : ≥500
- 11. Terminal:Crimp terminal
- 12. Rohs Compliance

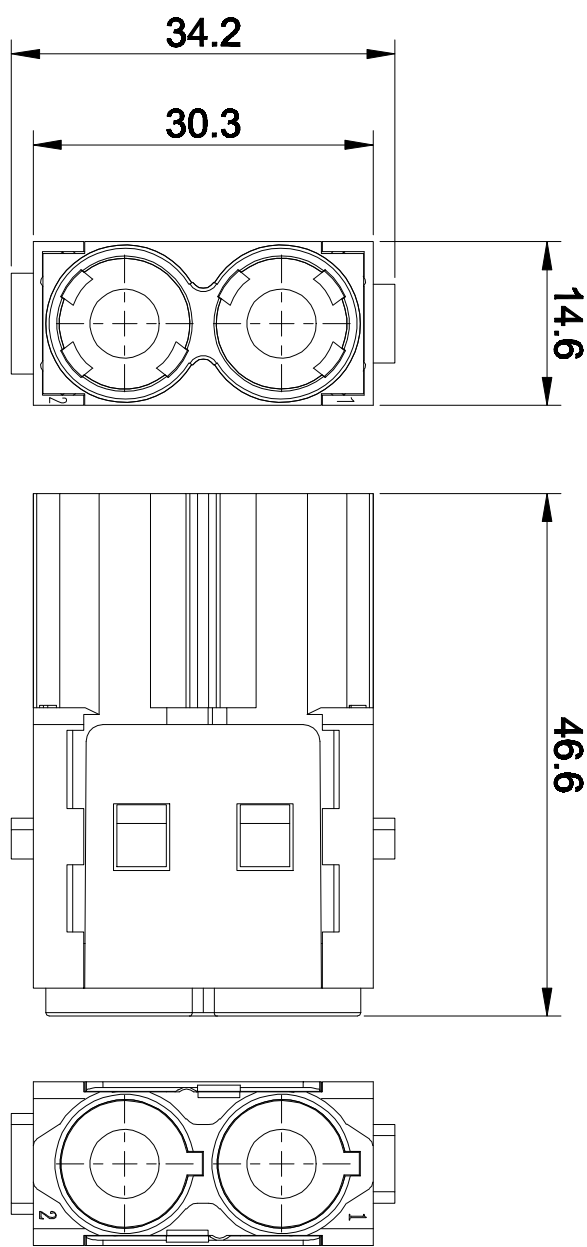

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HD09-FMK70-002-MC		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.		



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司