
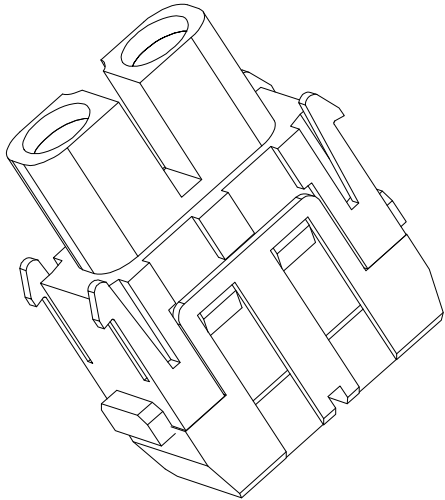


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 2
- 2. Rated Current: 40A
- 3. Rated Voltage: 1000V
- 4. Pollution degree: 3
- 5. Rated impulse voltage: 8KV
- 6. Insulation resistance: $\geq 10^{10} \Omega$
- 7. Material: Polycarbonate
- 8. Limiting temperatures: -40℃~+125℃
- 9. Flammability acc. to UL94: V0
- 10. Mechanical working life (mating cycles): ≥ 500
- 11. Terminal: Axial Screw terminal

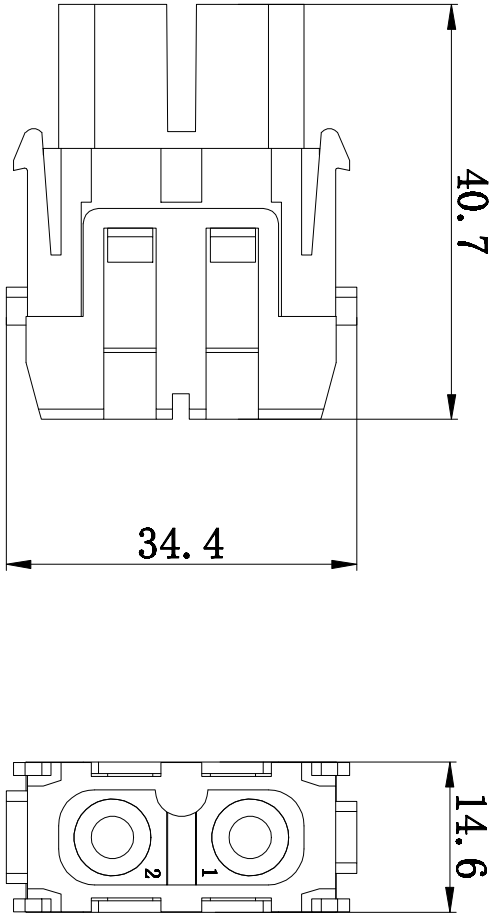

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	
APP.		DATE		NAME	UL0-HD09-1MK-002.2-F (6-10mm ²)	
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.		