
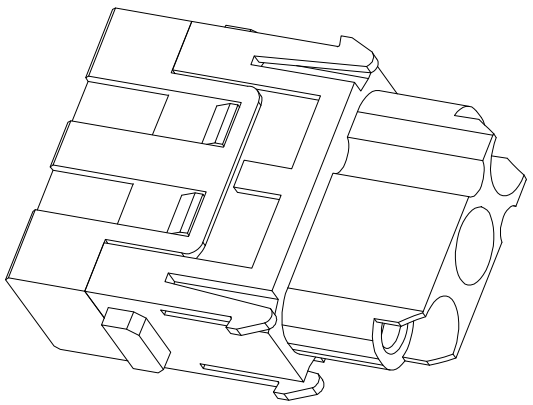


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts:3
- 2. Rated Current:40A
- 3. Rated Voltage:690V
- 4. Pollution degree:3
- 5. Rated impulse voltage:8KV
- 6. Insulation resistance: $\geq 10^9 \Omega$
- 7. Material:Polycarbonate
- 8. Limiting temperatures:-40℃~+125℃
- 9. Flammability acc. to UL94:V0
- 10. Mechanical working life(mating cycles) : ≥ 500
- 11. Terminal:Axial Screw terminal
- 12. Rohs Compliance

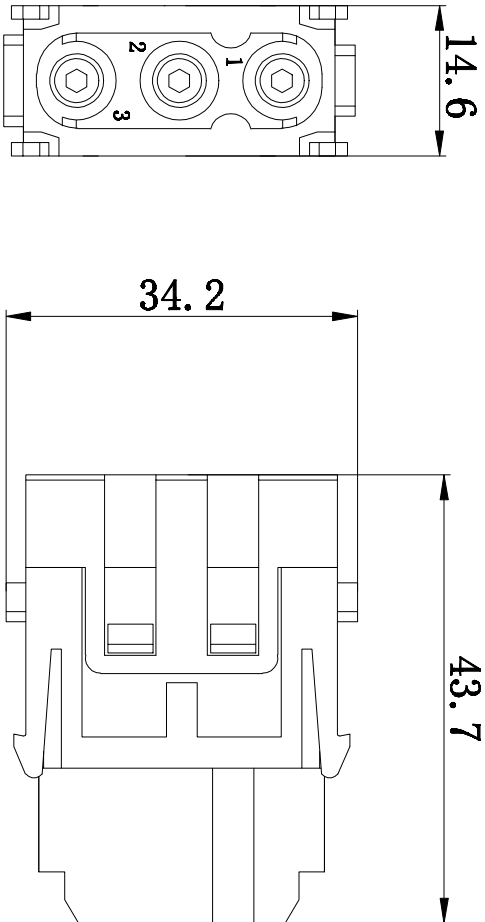

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE	SCALE	1:1	A4	
APP.	DATE	NAME	UL0-HD09-EMK-003.1-F (2.5-8mm ²)		
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		