
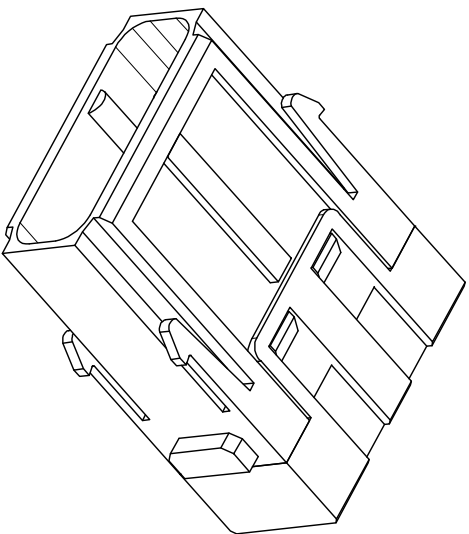


Technical characteristics:
Specifications

DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts:3
2. Rated Current:40A
3. Rated Voltage:690V
4. Pollution degree:3
5. Rated impulse voltage:8KV
6. Insulation resistance: $\geq 10^9 \Omega$
7. Material:Polycarbonate
8. Limiting temperatures:-40℃~+125℃
9. Flammability acc. to UL94:V0
10. Mechanical working life(mating cycles) : ≥ 500
11. Terminal:Axial Screw terminal
12. Rohs Compliance

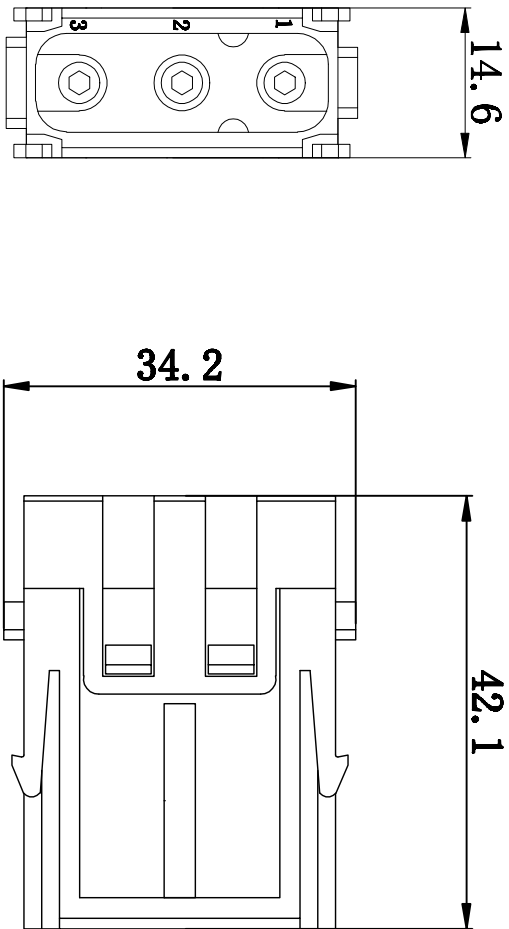

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.		DATE		SCALE 1:1	A4
APP.		DATE		NAME	
NINGBO UL0 ELECTRONICS CO.,LTD.					UL0-HD09-EMK-003. 2-M (6-10mm²)
NINGBO UL0 ELECTRONICS CO.,LTD.					DWGNO.



宁波欧路电子有限公司