
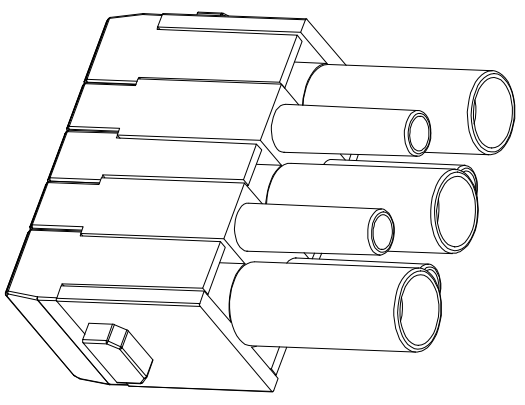


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts:3/4
2. Rated Current:40/10A
3. Rated Voltage:830V/830V
4. Pollution degree:3
5. Rated impulse voltage:8KV/8KV
6. Rated Voltage Acc.to UI:600V
7. Insulation resistance: $\geq 10^{10} \Omega$
8. Material:Polycarbonate
9. Limiting temperatures:-40℃~+125℃
10. Flammability acc. to UL94:V0
11. Mechanical working life(mating cycles) : ≥ 500
12. Terminal:Crimp terminal
13. Rohs Compliance

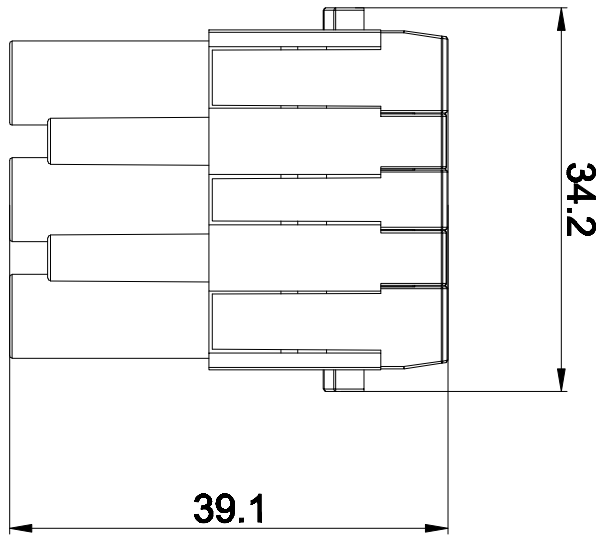

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HD09-HMK-003 / 4-FC		
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		