


34.2

44.3

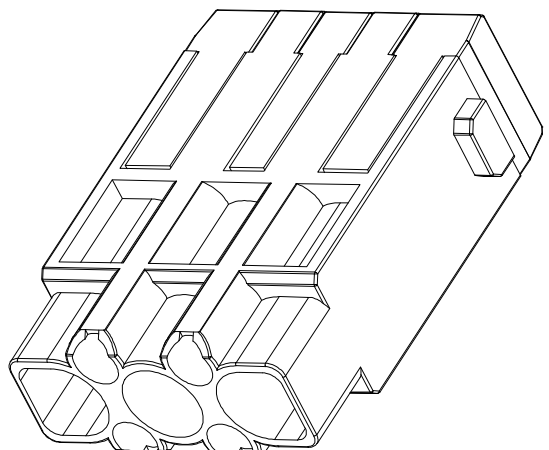

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts:3/4
2. Rated Current:40/10A
3. Rated Voltage:830V/830V
4. Pollution degree:3
5. Rated impulse voltage:8KV/8KV
6. Rated Voltage Acc.to UI:600V
7. Insulation resistance: $\geq 10^{10} \Omega$
8. Material:Polycarbonate
9. Limiting temperatures:-40℃~+125℃
10. Flammability acc.to UL94:V0
11. Mechanical working life(mating cycles) : ≥ 500
12. Terminal:Crimp terminal
13. Rohs Compliance

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME			
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.			
				UL0-HD09-FMK-003 / 4-MC			