
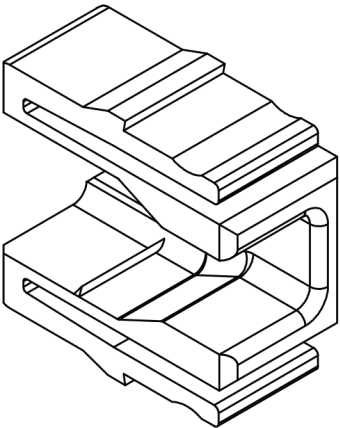


Electrical and transmission data apply to the assembled RJ45 interface with its connector and patch cable.

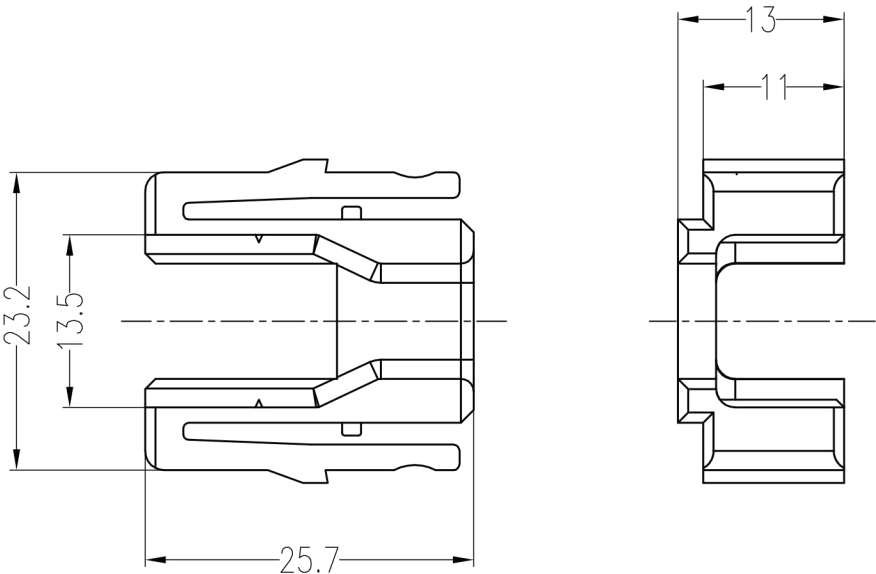


- 技术参数:

插芯:

 - 插针数: 8
 - 额定电流: 1A
 - 额定电压: 50V
 - 额定脉冲电压: 0.8kV
 - 污染等级: 3
 - 依据UL的额定电压: <30V
 - 传输特性: 超6类可达500MHz
 - 依据 ISO/IEC 24 702;
 - 依据 ISO/IEC 11 801
- Technical specification:

Inserts:

 - No. of contact: 8
 - Rated current: 1A
 - Rated voltage: 50V
 - Rated impulse voltage: 0.8kV
 - Pollution degree: 3
 - Rated voltage acc.to UL: <30V
 - Transmission features: Category 6A / Class EA
 - up to 500MHz; acc.
 - to ISO/IEC 24 702;
 - ISO/IEC 11 801
- 传输速度: 10/100/1000Mbit/10Gbit/s
 - 绝缘阻抗: $\geq 10^{10}\Omega$
 - 材料: 聚碳酸酯
 - 颜色: RAL 7032 (浅灰色)
 - 温度范围: $-40^{\circ}\text{C} - +85^{\circ}\text{C}$
 - 依据UL 94的阻燃等级: V0
 - 可插拔次数: ≥ 500
- Transmission rate: 10/100/1000Mbit/10Gbit/s
 - Insulation resistance: $\geq 10^{10}\Omega$
 - Material: polycarbonate
 - Colour: RAL 7032(light grey)
 - Temperature range: $-40^{\circ}\text{C} - +85^{\circ}\text{C}$
 - Flammability acc.to UL 94: V0
 - Mating cycles: ≥ 500

 			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0		1:1	SO-HM-RJ45-APT
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			