
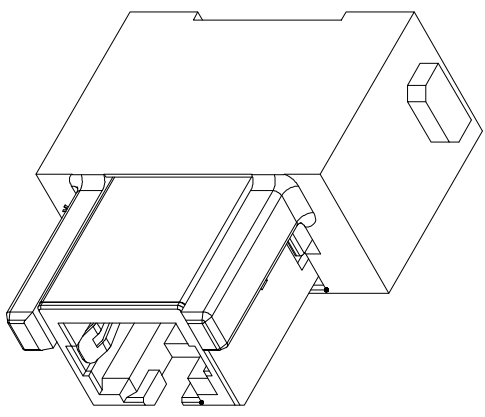


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 8
- 2. Rated Current: 1A
- 3. Rated Voltage: 50V
- 4. Pollution degree: 3
- 5. Rated impulse voltage: 0.8KV
- 6. Rated voltage acc. to UL: <30V
- 7. Transmission features: Category 6/Class E up to 500 MHz; acc. to ISO/IEC 24 702 ISO/IEC 11 801
- 8. Transmission rate: 10/100/1000Mb/s
- 9. Insulation resistance: $\geq 10^{10} \Omega$
- 10. Material: Polycarbonate
- 11. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 12. Flammability acc. to UL94: V0
- 13. Mechanical working life (mating cycles): ≥ 500
- 14. Rohs Compliance

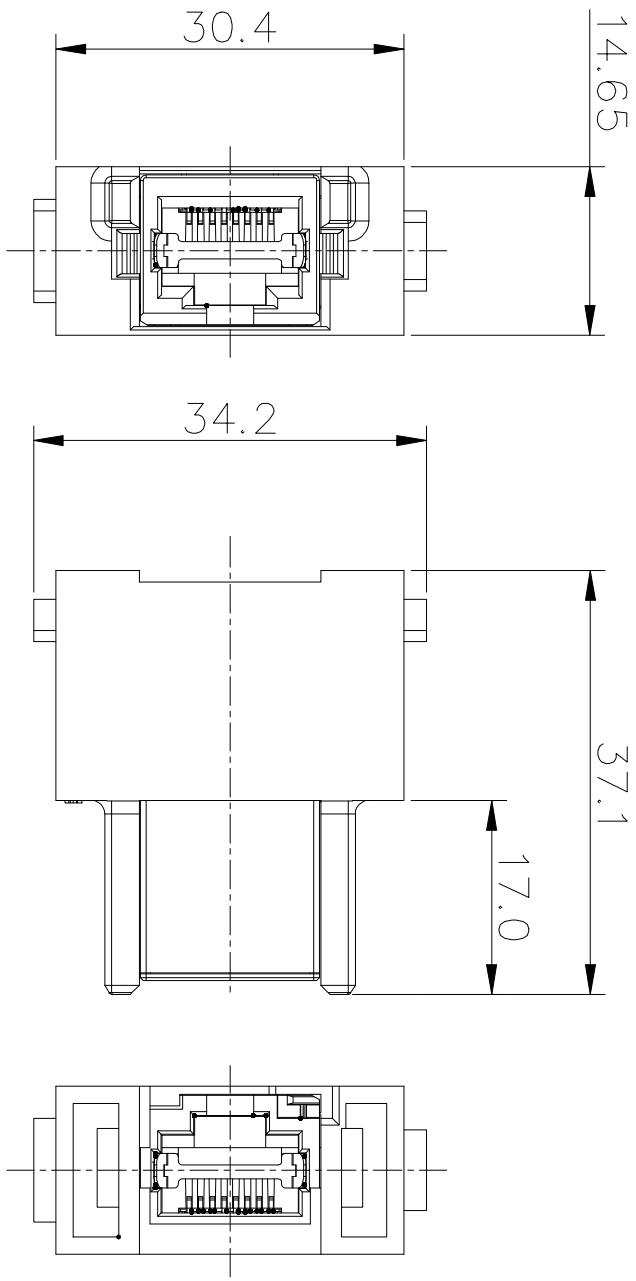

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	A4
APP.	DATE	NAME	UL0-HD09-1M-RJ45-F		



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.