



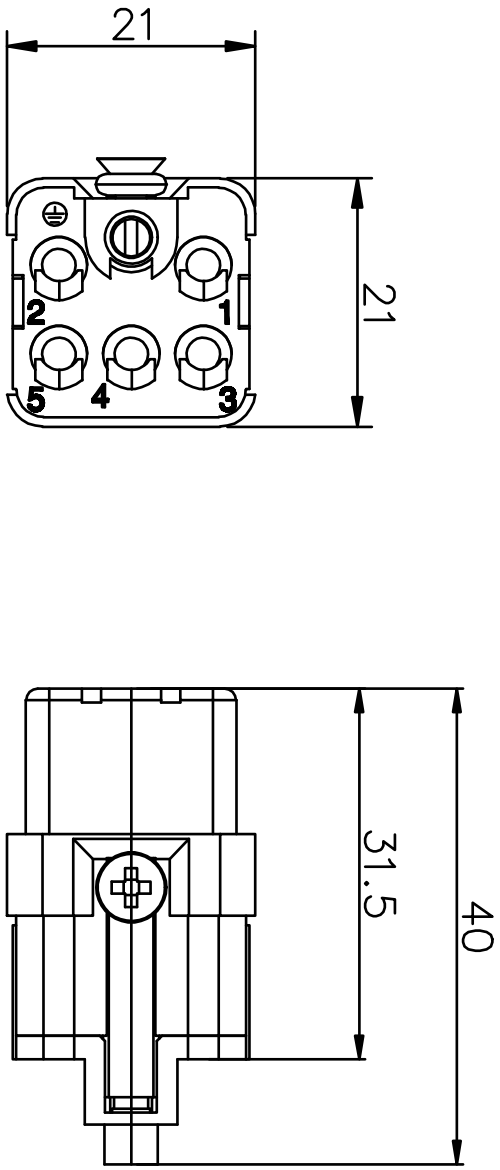

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

- 1. Number of contacts: 005/0+PE
- 2. Rated Current: 16A
- 3. Rated Voltage Conductor-ground: 230V
- 4. Rated Voltage Conductor-conductor: 400V
- 5. Pollution degree: 3
- 6. Rated impulse voltage: 4kV
- 7. Insulation resistance: $\geq 10^{10} \Omega$
- 8. Material: Polycarbonate
- 9. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 10. Flammability acc. to UL94: V0
- 11. Mechanical working life (mating cycles): ≥ 500
- 12. Terminal: Crimp terminal
- 13. Rohs Compliance

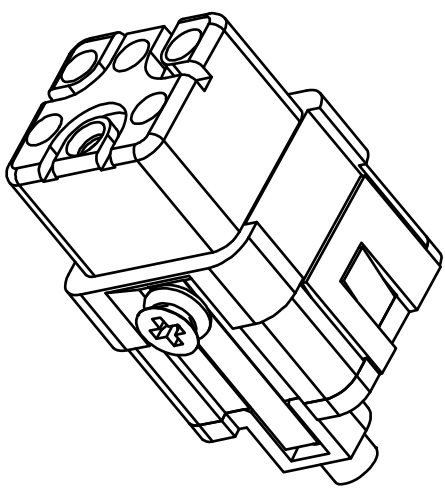

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.	DATE			SCALE 1:1	A4
APP.	DATE				
NINGBO UL0 ELECTRONICS CO.,LTD.				NAME	UL0-HD08-HQ-005/0-FC
宁波欧路电子有限公司				DWGNO.	