



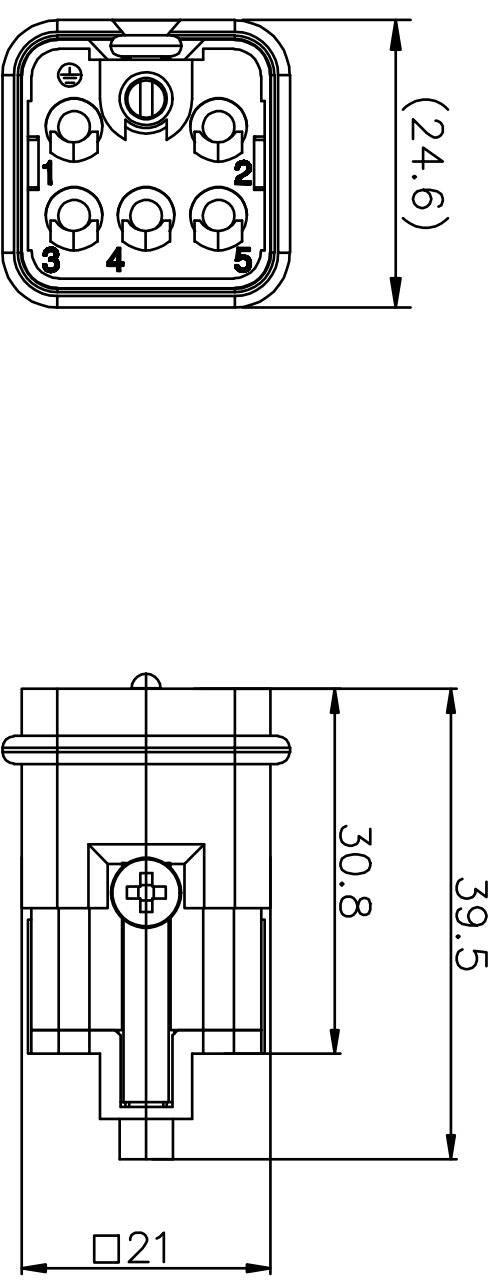

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

- Inserts
- 1. Number of contacts: 005/0+PE
 - 2. Rated Current: 16A
 - 3. Rated Voltage Conductor-ground :230V
 - 4. Rated Voltage Conductor-conductor :400V
 - 5. Pollution degree:3
 - 6. Rated impulse voltage:4kV
 - 7. Insulation resistance: $\geq 10^9 \Omega$
 - 8. Material:Polycarbonate
 - 9. Limiting temperatures:-40℃~+125℃
 - 10. Flammability acc. to UL94:V0
 - 11. Mechanical working life(mating cycles) : ≥ 500
 - 12. Terminal:Crimp terminal
 - 13. Rohs Compliance

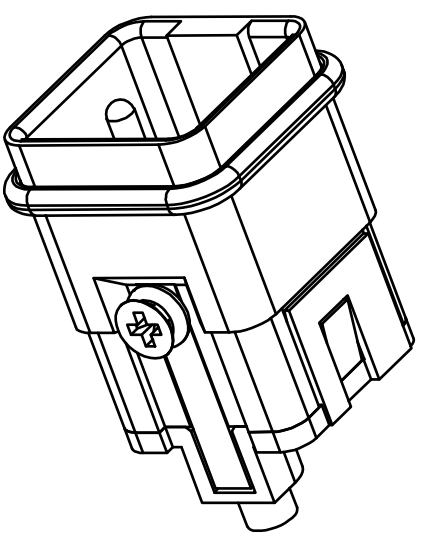

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HD08-HQ-005/0-MC		
 NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.		