



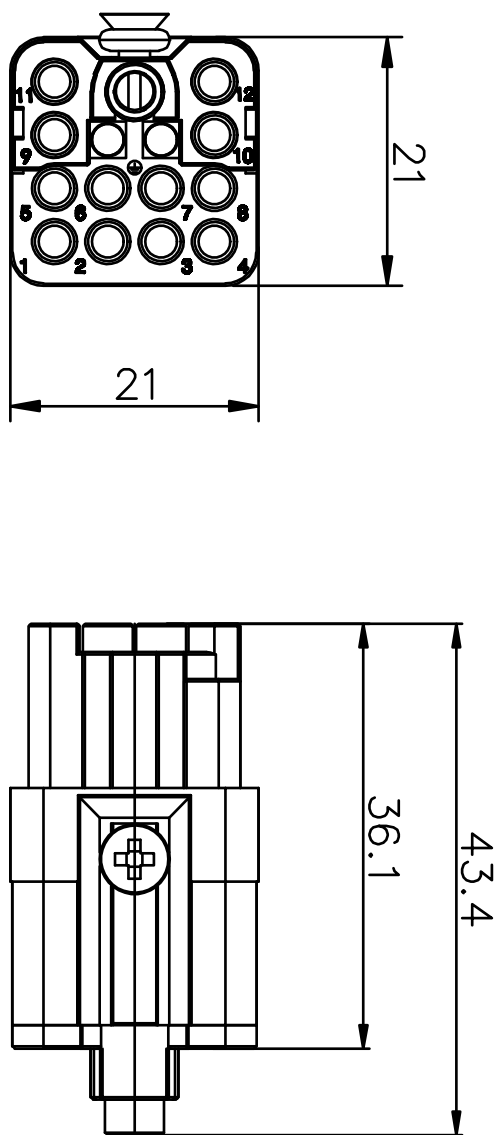

Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts: 012/0+PE
2. Rated Current: 10A
3. Rated Voltage: 400V
5. Pollution degree: 3
6. Rated impulse voltage: 6KV
7. Insulation resistance: $\geq 10^9 \Omega$
8. Material: Polycarbonate
9. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
10. Flammability acc. to UL94: V0
11. Mechanical working life (mating cycles): ≥ 500
12. Terminal: Crimp terminal
13. Rohs Compliance

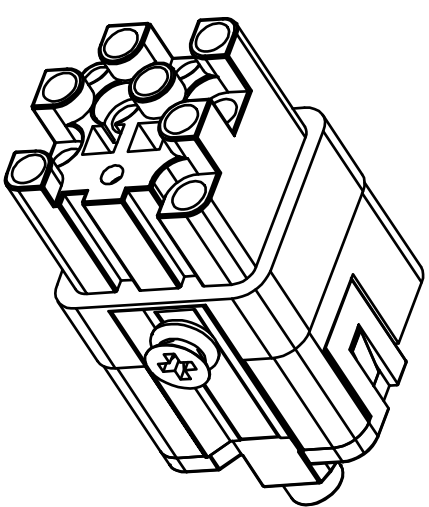

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	MM	SHEET/OF 1/1
CHK.		DATE		SCALE 1:1	A4
APP.		DATE			
NAME				UL0-HD08-HQ-012/0-FC	
DWGNO.					