
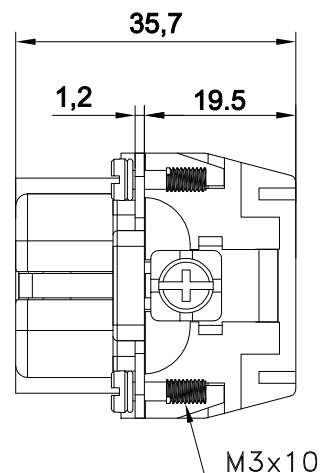


REV		E.C.N NO.		CONTENT		CHK	DATE

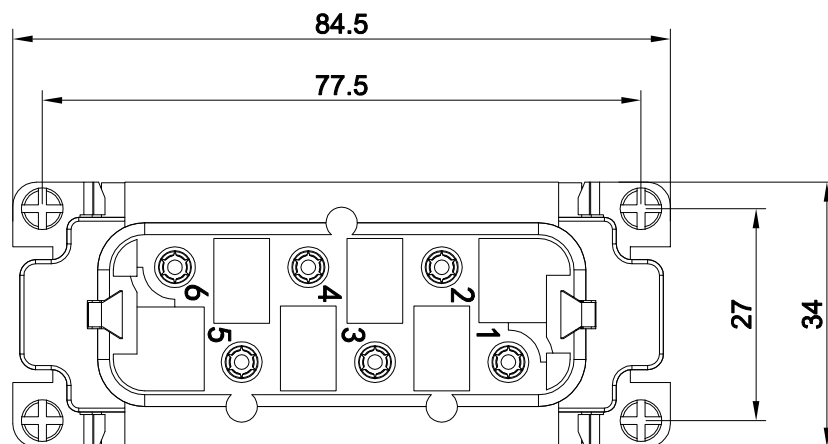

Technical characteristics:



Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

1. Number of contacts: 6+PE
2. Rated Current: 35A
3. Rated Voltage-ground: 400V
4. Rated Voltage-conductor: 690V
5. Pollution degree: 3
6. Rated impulse voltage: 6KV
7. or: 35A 500V 6KV 3
8. Insulation resistance: $\geq 10^{10} \Omega$
9. Material: Polycarbonate
10. Rated voltage acc. to UL/CSA: 600V
11. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
12. Flammability acc. to UL94: V0
13. Mechanical working life (mating cycles): ≥ 500

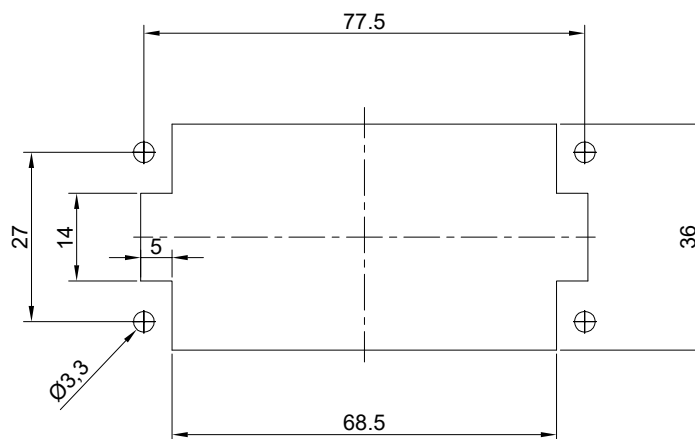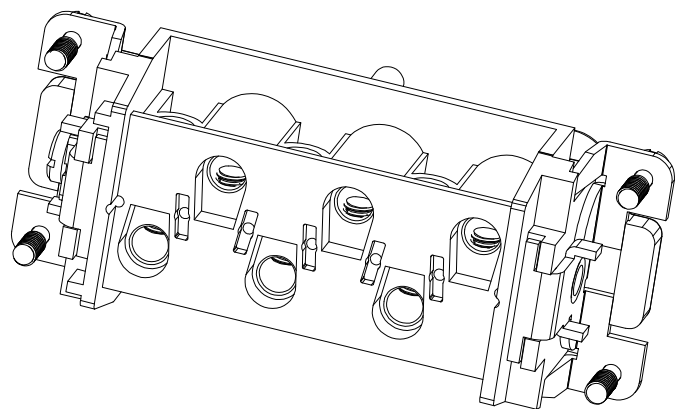

面板安装开孔图

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 1\text{m} \Omega$
4. Terminal: Screw terminal
5. Wire gauge: 1.5-6mm² (16-10AWG)
6. Tightening torque: 1.2Nm
7. Stripping length: 11mm
8. Rohs Compliance

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	23.11.27	UNITS	MM	SHEET/OF	1 / 1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE		NAME	ULO-HD06-HSB-006-F			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

ULO-HD06-HSB-006-F