
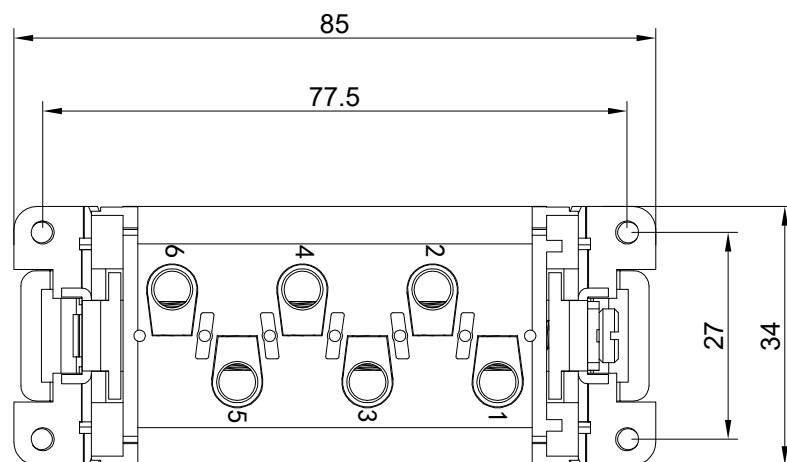
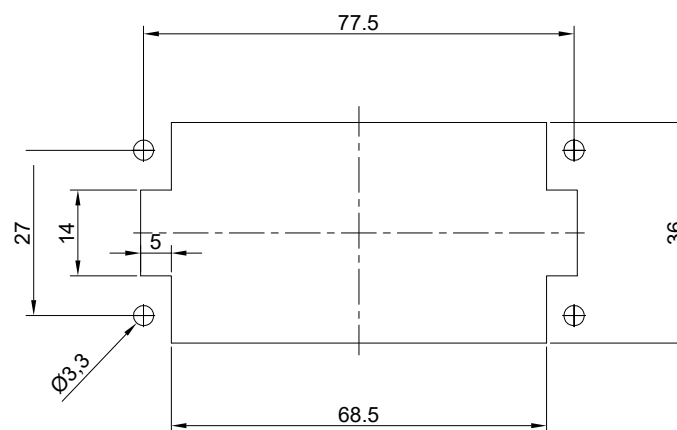


Technical characteristics:
Specifications
DIN EN 60 664-1
DIN EN 61 984

Inserts

1. Number of contacts: 6+PE
2. Rated Current: 35A
3. Rated Voltage-ground: 400V
4. Rated Voltage-conductor: 690V
5. Pollution degree: 3
6. Rated impulse voltage: 6KV
7. or: 35A 500V 6KV 3
8. Insulation resistance: $\geq 10^{10} \Omega$
9. Material: Polycarbonate
10. Rated voltage acc. to UL/CSA: 600V
11. Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
12. Flammability acc. to UL94: V0
13. Mechanical working life (mating cycles): ≥ 500

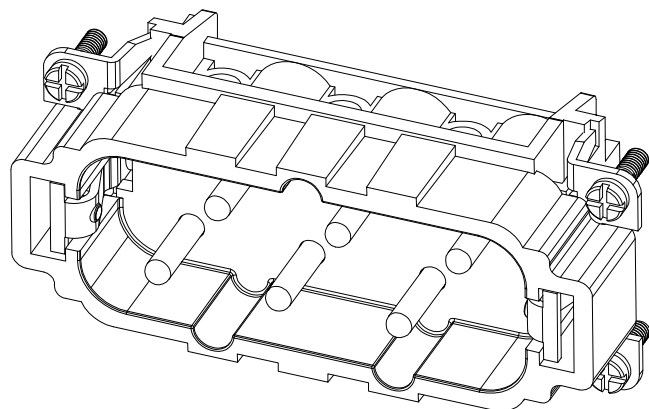

面板安装开孔图

Contacts

1. Material: Copper alloy
2. Surface: hard-silver plated
3. Contact resistance: $\leq 1\text{m} \Omega$
4. Terminal: Screw terminal
5. Wire gauge: 1.5-6mm² (16-10AWG)
6. Tightening torque: 1.2Nm
7. Stripping length: 9mm
8. Rohs Compliance

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	23.11.27	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-HD06-HSB-006-M
				DWGNO.	