





8Pin A coding

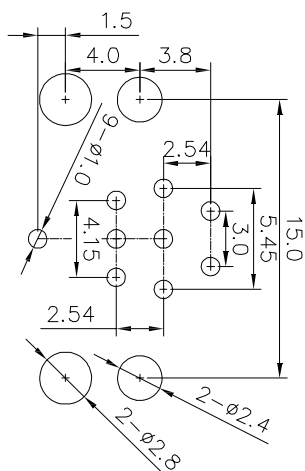


12Pin A coding



PCB layout

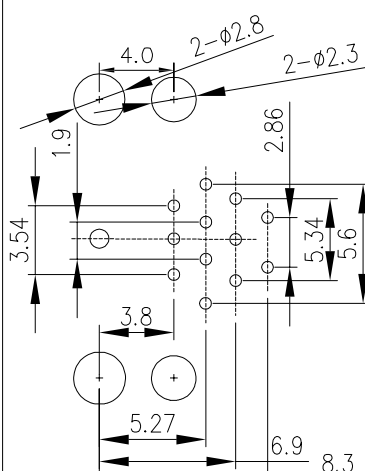


PCB layout

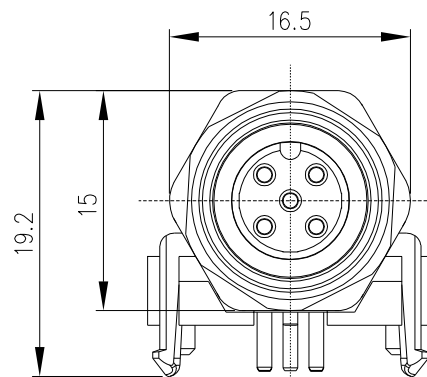

ULO-CC03-M12X-XXP-FF-ST-SF003


Coding:
A:A-Coding
B:B-Coding
D:D-Coding

Pin: 04, 05
, 08, 12

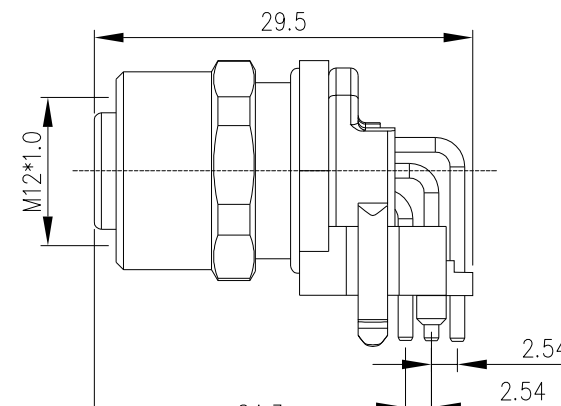

NOTES:

- Rated voltage/Rated current:
3/4Pin A:250V/4A
5Pin A:60V/4A
6/8Pin A:30V/2A
4Pin D:250V/4A
5Pin B:60V/4A
12Pin A:30V/1.5A
- Withstanding voltage:
3/4Pin A:AC1500V
5Pin:AC1200V
6/8Pin:650V
5Pin B:1120V
4Pin D:1500V
12Pin A:500V
- Contact resistance: $\leq 3\text{m}\Omega$
- Levels of protection: IP67
- Operating temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Mechanical life: > 50
- RoHS Compliance
- Tolerance:
.X ± 0.3
.XX ± 0.1
Angles $\pm 1^{\circ}$



Panel cut

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.29	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NINGBO ULO ELECTRONICS CO.,LTD.		NAME	ULO-CC03-M12X-XXP-FF-ST-SF003	
	宁波欧路电子有限公司		DWGNO.		