




10Pin A coding






12Pin A coding



5Pin B coding



4Pin D coding

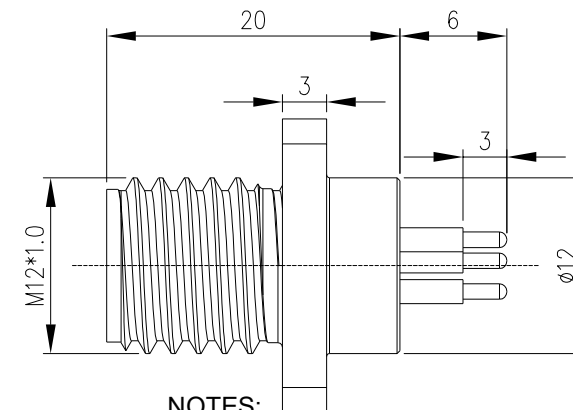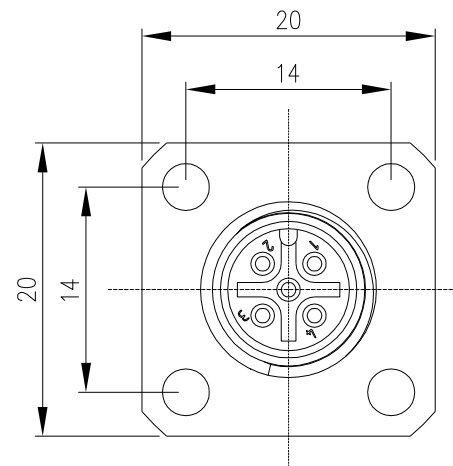

NOTES:

1.Rated voltage/Rated current:

3/4Pin A:250V/4A

5Pin A:60V/4A

6/8Pin A:30V/2A

4Pin D:250V/4A

5Pin B:60V/4A

10/12Pin A:30V/1.5A

2.Withstanding voltage:

3/4Pin A:AC1500V

5Pin:AC1200V

6/8Pin:650V

5Pin B:1120V

4Pin D:1500V

10/12Pin A:500V

3.Contact resistance: $\leq 3\text{m}\Omega$

4.Levels of protection: IP67

5.Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 6.Mechanical life: > 50

7.RoHS Compliance

8.Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$


ULO-CC03-M12X-XXP-MM-SP-SS000

Coding:

A:A-Coding


B:B-Coding

D:D-Coding

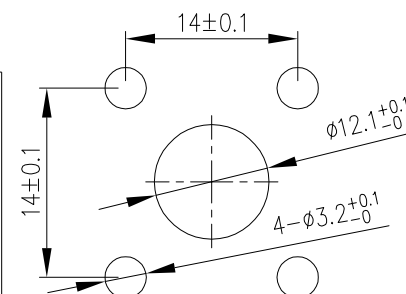
Pin: 03, 04, 05
06, 08, 10, 12

Panel cut


3Pin A coding




4Pin A coding





5Pin A coding




6Pin A coding




8Pin A coding




PCB layout




PCB layout



PCB layout



PCB layout



PCB layout

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.26	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NAME		ULO-CC03-M12X-XXP-MM-SP-SS000		
	DWGNO				