
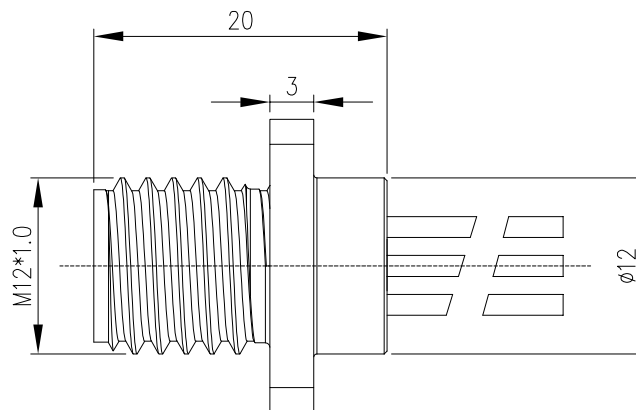


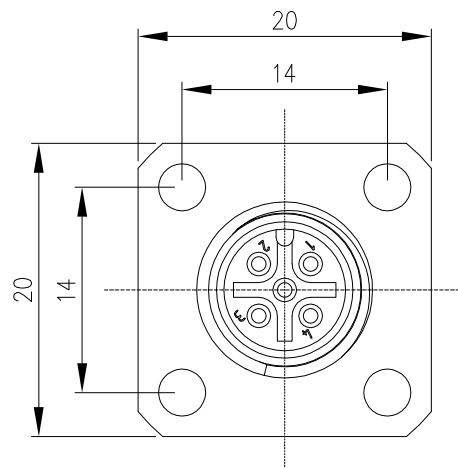

NOTES:

1. Rated voltage/Rated current:

3/4Pin A:250V/4A

5Pin A:60V/4A

6/8Pin A:30V/2A

4Pin D:250V/4A

5Pin B:60V/4A

10/12Pin A:30V/1.5A

2. Withstanding voltage:

3/4Pin A:AC1500V

5Pin:AC1200V

6/8Pin:650V

5Pin B:1120V

4Pin D:1500V

10/12Pin A:500V


3. Contact resistance: $\leq 3\text{m}\Omega$

4. Levels of protection: IP67

5. Operating temperature: $-40^\circ\text{C} \sim +85^\circ\text{C}$ 6. Mechanical life: > 50

7. RoHS Compliance

8. Tolerance:

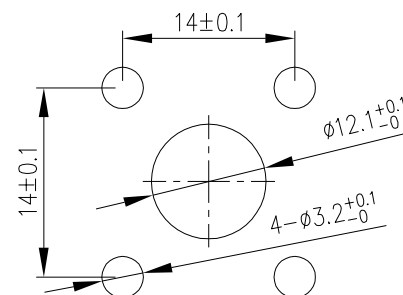.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$ 

Panel cut

ULO-CC03-M12X-XXP-MM-SD-SS0XX

Coding:

A:A-Coding

B:B-Coding

D:D-Coding

Pin: 03, 04, 05

06, 08, 10, 12

Cable length

15:150mm

30:300mm

50:500mm

...



A0:1000mm

A1:1100mm

B0:2000mm

B5:2500mm

...

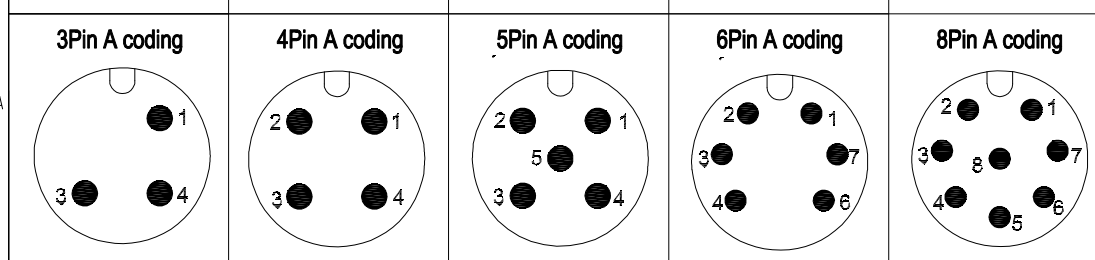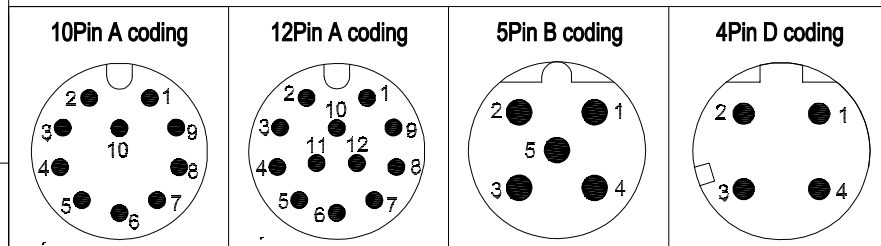

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.26	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NAME		ULO-CC03-M12X-XXP-MM-SD-SS0XX		
	DWGNO.				