

NOTES:

1. Rated voltage/Rated current:

3/4Pin A:250V/4A

5Pin A:60V/4A

6/8Pin A:30V/2A

4Pin D:250V/4A

5Pin B:60V/4A

10/12Pin A:30V/1.5A

2. Withstanding voltage:

3/4Pin A:AC1500V

5Pin:AC1200V

6/8Pin:650V

5Pin B:1120V

4Pin D:1500V

10/12Pin A:500V




3. Contact resistance: $\leq 3\text{m}\Omega$

4. Levels of protection: IP67


5. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 6. Mechanical life: > 50

7. RoHS Compliance

8. Tolerance:

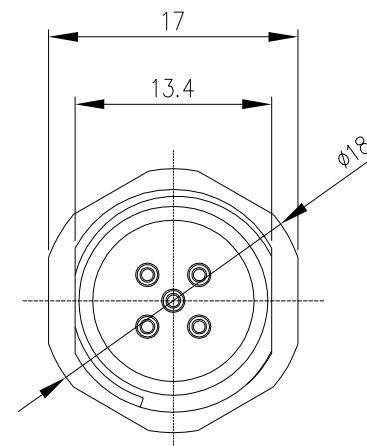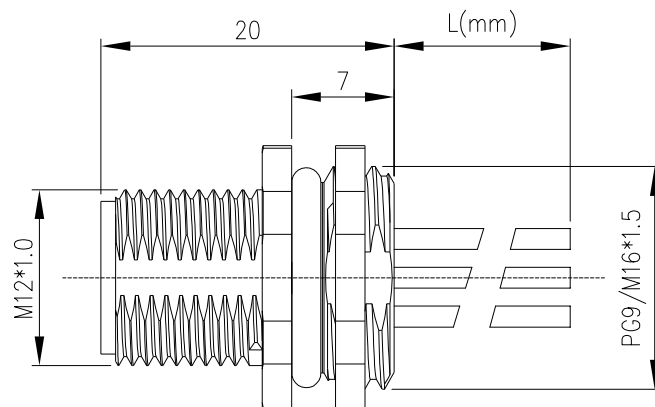
.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$ 

PG9 Panel cut




M16*1.5 Panel cut


10Pin A coding




12Pin A coding




5Pin B coding




4Pin D coding




3Pin A coding




4Pin A coding




5Pin A coding



6Pin A coding



8Pin A coding



ULO-CC03-M12X-XXP-MM-SD-SHXXX

Coding:

A:A-Coding

B:B-Coding

D:D-Coding

A:PG9

B:M16*1.5

Pin: 03, 04, 05
06, 08, 10, 12

Cable length

15:150mm

30:300mm

50:500mm

...

A0:1000mm

A1:1100mm

B0:2000mm

B5:2500mm

...

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.26	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD.			NAME	ULO-CC03-M12X-XXP-MM-SD-SHXXX	
宁波欧路电子有限公司			DWGNO.		