





8Pin A coding

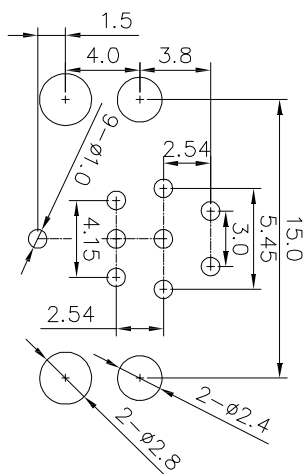



12Pin A coding



PCB layout

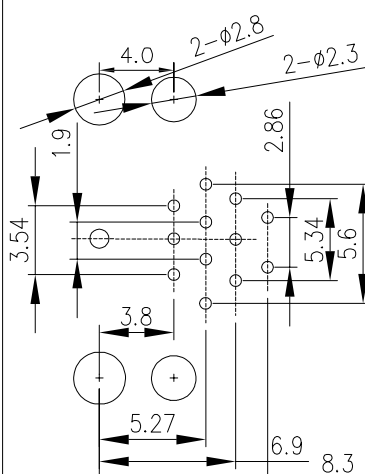

PCB layout

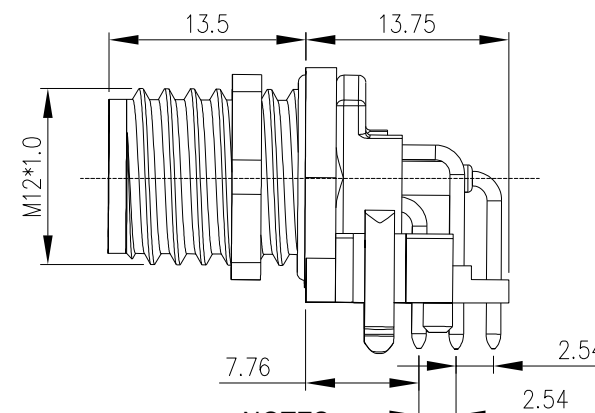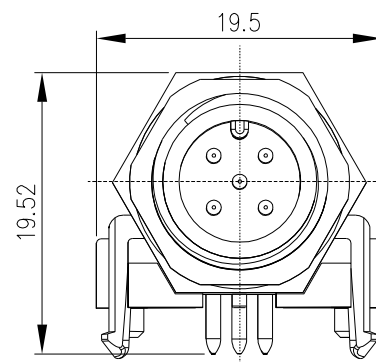

NOTES:

1. Rated voltage/Rated current:

3/4Pin A: 250V/4A

5Pin A: 60V/4A

6/8Pin A: 30V/2A

4Pin D: 250V/4A

5Pin B: 60V/4A

12Pin A: 30V/1.5A

2. Withstanding voltage:

3/4Pin A: AC1500V

5Pin: AC1200V

6/8Pin: 650V

5Pin B: 1120V

4Pin D: 1500V

12Pin A: 500V

3. Contact resistance: $\leq 3m\Omega$

4. Levels of protection: IP67

5. Operating temperature: $-40^{\circ}C \sim +85^{\circ}C$ 6. Mechanical life: > 50

7. RoHS Compliance

8. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$

ULO-CC03-M12X-XXP-MM-ST-SF003

Coding:


A: A-Coding

B: B-Coding


D: D-Coding

Pin: 04, 05
, 08, 12


4Pin D coding





4Pin A coding




5Pin B coding




5Pin A coding

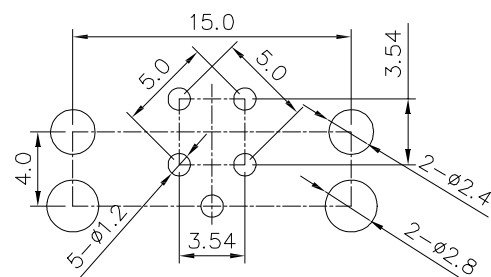

PCB layout

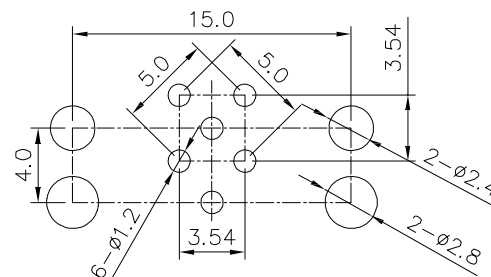

PCB layout



Panel cut

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.29	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NAME		ULO-CC03-M12X-XXP-MM-ST-SF003		
	DWGNO				



NINGBO ULO ELECTRONICS CO., LTD.

宁波欧路电子有限公司