


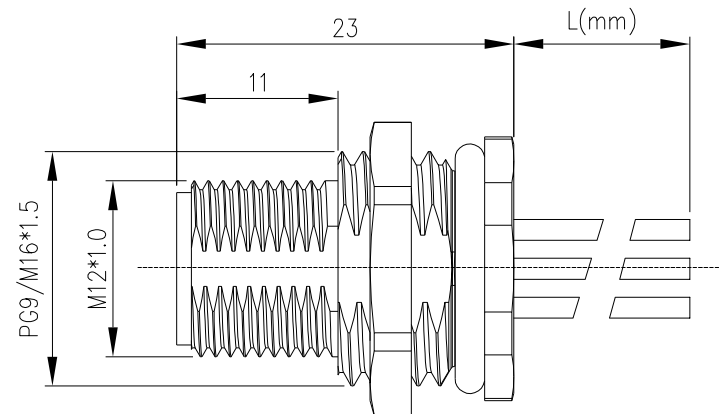


- NOTES:
- 1.Rated voltage/Rated current:
3/4Pin A:250V/4A
5Pin A:60V/4A
6/8Pin A:30V/2A
4Pin D:250V/4A
5Pin B:60V/4A
10/12Pin A:30V/1.5A
- 2.Withstanding voltage:
3/4Pin A:AC1500V
5Pin:AC1200V
6/8Pin:650V
5Pin B:1120V
4Pin D:1500V
10/12Pin A:500V
- 3.Contact resistance: ≤3mΩ
- 4.Levels of protection: IP67
- 5.Operating temperature:-40℃~+85℃
- 6.Mechanical life: > 50
- 7.RoHS Compliance
- 8.Tolerance:
.X ±0.3
.XX ±0.1
Angles ±1°

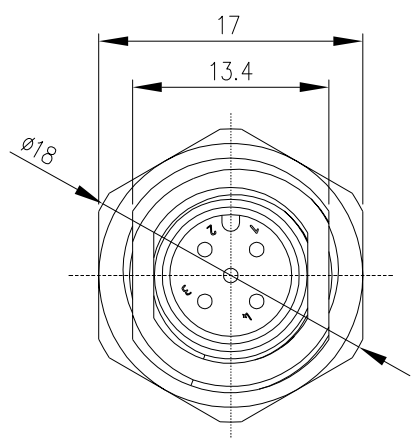

PG9 Panel cut



M16*1.5 Panel cut

10Pin A coding

12Pin A coding

5Pin B coding

4Pin D coding

3Pin A coding

4Pin A coding

5Pin A coding

6Pin A coding

8Pin A coding

ULO-CC03-M12X-XXP-MM-SP-SFXXX

Coding: _____

A:A-Coding
B:B-Coding
D:D-Coding

Pin: 03, 04, 05
06, 08, 10, 12

A:PG9
B:M16*1.5

Cable length
15:150mm
30:300mm
50:500mm
...
A0:1000mm
A1:1100mm
B0:2000mm
B5:2500mm
...

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.26	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD.			NAME	ULO-CC03-M12X-XXP-MM-SP-SFXXX	
宁波欧路电子有限公司			DWGNO		