





8Pin A coding



12Pin A coding



PG9 Panel cut



M16*1.5 Panel cut

NOTES:

1.Rated voltage/Rated current:

3/4Pin A:250V/4A

5Pin A:60V/4A

6/8Pin A:30V/2A

4Pin D:250V/4A

5Pin B:60V/4A

12Pin A:30V/1.5A

2.Withstanding voltage:

3/4Pin A:AC1500V

5Pin:AC1200V

6/8Pin:650V

5Pin B:1120V

4Pin D:1500V

12Pin A:500V

3.Contact resistance: ≤3mΩ

4.Levels of protection: IP67

5.Operating temperature:-40℃~+85℃

6.Mechanical life: >50

7.RoHS Compliance


8.Tolerance:

.X ±0.3


.XX ±0.1

Angles ±1°

PCB layout



PCB layout

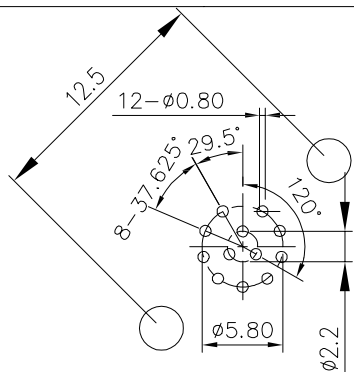

ULO-CC03-M12X-XXP-MM-SPSH-SF00X

Coding:

A:A-Coding

B:B-Coding


D:D-Coding

001:PG9


002:M16*1.5

Pin: 03, 04, 05
06,08,12


4Pin A coding




4Pin D coding




5Pin A coding






5Pin B coding



PCB layout



PCB layout

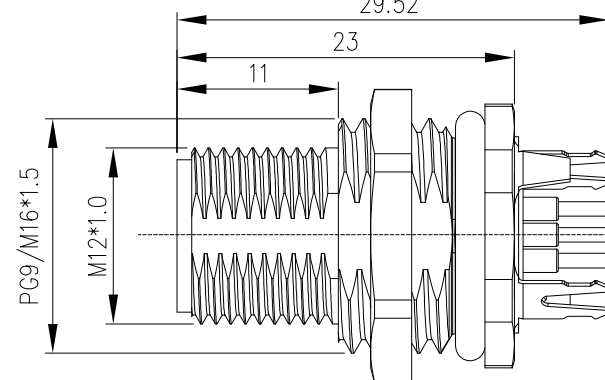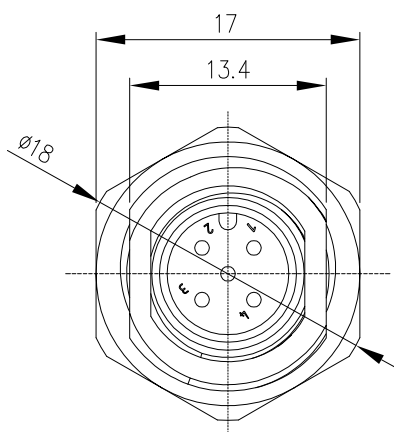

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.26	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
	NINGBO ULO ELECTRONICS CO.,LTD.		NAME	ULO-CC03-M12X-XXP-MM-SPSH-SF00X	
	宁波欧路电子有限公司		DWGNO.		