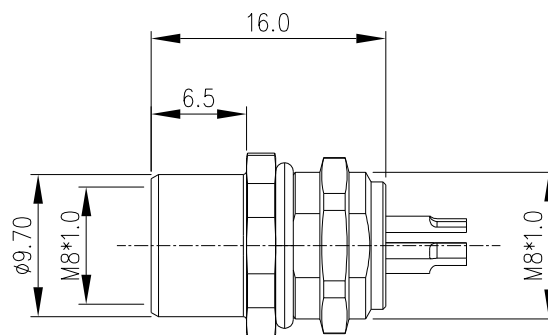



Panel cut

## NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V d.c./3A

6/8Pin:30V d.c./1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance :  $\leq 3\text{m}\Omega$ 

4.Levels of protection: IP67

5.Wire connection mode:soldering

6.Operating temperature:-40 °C~+85 °C

7.Mechanical life: &gt;50

8.RoHS Compliance

9.Tolerance:

.X  $\pm 0.3$ .XX  $\pm 0.1$ Angles  $\pm 1^\circ$ 

ULO-CC02-M8X-XXP-FF-SD-SH003

Coding:

A:A-Coding

B:B-Coding

Pin: 03, 04,  
05, 06, 08

001:M10\*0.75


002:M8\*0.5

003:M8\*1.0


004:M12\*1.0

005:M8\*1.0(plastic)


8Pin A coding




6Pin A coding




5Pin B coding



4Pin A coding



3Pin A coding



| ITEM | NAME OF PART | NO. OF PART | Q'TY                         | MATERIAL | NOTE |
|------|--------------|-------------|------------------------------|----------|------|
| DWG. | LZM          | DATE        | 24.1.18                      | UNITS    | MM   |
| CHK. |              | DATE        |                              | SCALE    | 1:1  |
| APP. |              | DATE        |                              |          |      |
|      | NAME         |             | ULO-CC02-M8X-XXP-FF-SD-SH003 |          |      |
|      | DWGNO        |             |                              |          |      |

NINGBO ULO ELECTRONICS CO.,LTD.  
宁波欧路电子有限公司