

## NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V d.c./3A

6/8Pin:30V d.c./1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance :  $\leq 3\text{m}\Omega$ 

4.Levels of protection: IP67

5.Wire connection mode:soldering

6.Operating temperature:-40 °C~+85 °C

7.Mechanical life: &gt;50

8.RoHS Compliance

9.Tolerance:

.X  $\pm 0.3$ .XX  $\pm 0.1$ Angles  $\pm 1^\circ$ 

ULO-CC02-M8X-XXP-MM-SD-SH002

Coding:

A:A-Coding

B:B-Coding

Pin: 03, 04,  
05, 06, 08


001:M10\*0.75

002:M8\*0.5



003:M8\*1.0

004:M12\*1.0


005:M8\*1.0(plastic)




Panel cut

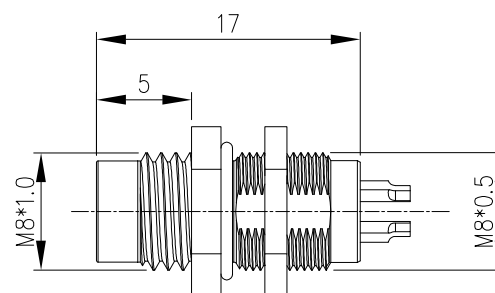


8Pin A coding




6Pin A coding




5Pin B coding



4Pin A coding



3Pin A coding



| ITEM | NAME OF PART                    | NO. OF PART | Q'TY    | MATERIAL                     | NOTE  |
|------|---------------------------------|-------------|---------|------------------------------|-------|
| DWG. | LZM                             | DATE        | 24.1.18 | UNITS                        | MM    |
| CHK. |                                 | DATE        |         | SCALE                        | 1 : 1 |
| APP. |                                 | DATE        |         |                              |       |
|      | NINGBO ULO ELECTRONICS CO.,LTD. |             | NAME    | ULO-CC02-M8X-XXP-MM-SD-SH002 |       |
|      | 宁波欧路电子有限公司                      |             | DWGNO   |                              |       |