
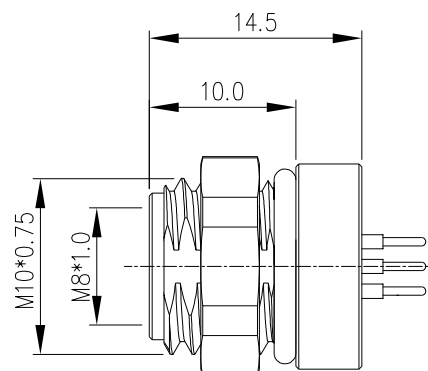


Panel cut



NOTES:

1. Rated voltage/Rated current:

3/4Pin: 60V d.c./3A

5Pin: 30V d.c./3A

6/8Pin: 30V d.c./1.5A

2. Withstanding voltage:

3/4Pin: 850V

5/6/8Pin: 650V

3. Contact resistance: $\leq 3\text{m}\Omega$

4. Levels of protection: IP67

5. Wire connection mode: soldering


6. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 7. Mechanical life: > 50

8. RoHS Compliance


9. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$


8Pin A coding




6Pin A coding





5Pin B coding




4Pin A coding




3Pin A coding




PCB layout




PCB layout



PCB layout



PCB layout



PCB layout

ULO-CC02-M8X-XXP-FF-SP-SF001

Coding:

A: A-Coding

B: B-Coding

Pin: 03, 04,
05, 06, 08

001: M10*0.75

002: M8*0.5

003: M8*1.0

004: M12*1.0

005: M8*1.0(plastic)

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZM	DATE	24.1.18	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE					
				NAME	ULO-CC02-M8X-XXP-FF-SP-SF001		
NINGBO ULO ELECTRONICS CO., LTD. 宁波欧路电子有限公司				DWGNO.			