
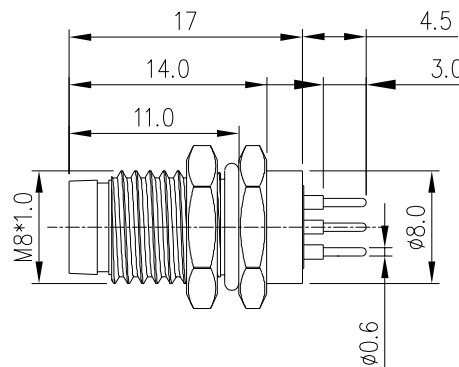


Panel cut



NOTES:

1. Rated voltage/Rated current:

3/4Pin: 60V d.c./3A

5Pin: 30V d.c./3A

6/8Pin: 30V d.c./1.5A

2. Withstanding voltage:

3/4Pin: 850V

5/6/8Pin: 650V

3. Contact resistance: $\leq 3\text{m}\Omega$

4. Levels of protection: IP67

5. Wire connection mode: soldering

6. Operating temperature: $-40^\circ\text{C} \sim +85^\circ\text{C}$ 7. Mechanical life: > 50

8. RoHS Compliance

9. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$

ULO-CC02-M8X-XXP-MM-SP-SF003


Coding:

A: A-Coding


B: B-Coding

Pin: 03, 04,
05, 06, 08


8Pin A coding




6Pin A coding





5Pin B coding




4Pin A coding




3Pin A coding




PCB layout




PCB layout



PCB layout



PCB layout



PCB layout

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.18	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NINGBO ULO ELECTRONICS CO.,LTD.		NAME	ULO-CC02-M8X-XXP-MM-SP-SF003	
	宁波欧路电子有限公司		DWGNO.		