
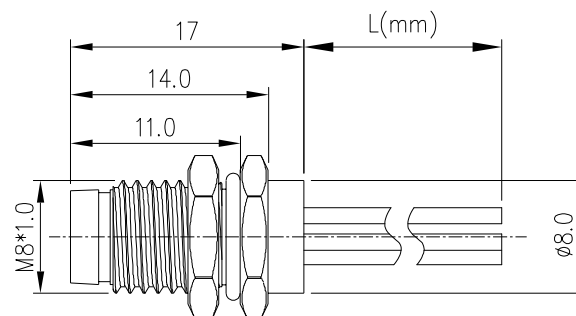




NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V d.c./3A

6/8Pin:30V d.c./1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance : $\leq 3m\Omega$

4.Levels of protection: IP67


5.Wire connection mode:soldering

6.Operating temperature:-40℃~+85℃

7.Mechanical life: >50

8.RoHS Compliance

9.Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$ 

Panel cut

ULO-CC02-M8X-XXP-MM-SD-SFCXX

Coding:

A:A-Coding

B:B-Coding

Pin: 03, 04,
05, 06, 08

A:M10*0.75

B:M8*0.5

C:M8*1.0

D:M12*1.0

Cable length

15:150mm

30:300mm

50:500mm

...

A0:1000mm


A1:1100mm

B0:2000mm


B5:2500mm

...


8Pin A coding




6Pin A coding




5Pin B coding



4Pin A coding



3Pin A coding



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.18	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
				NAME	ULO-CC02-M8X-XXP-MM-SD-SFCXX
				DWGNO.	



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司