
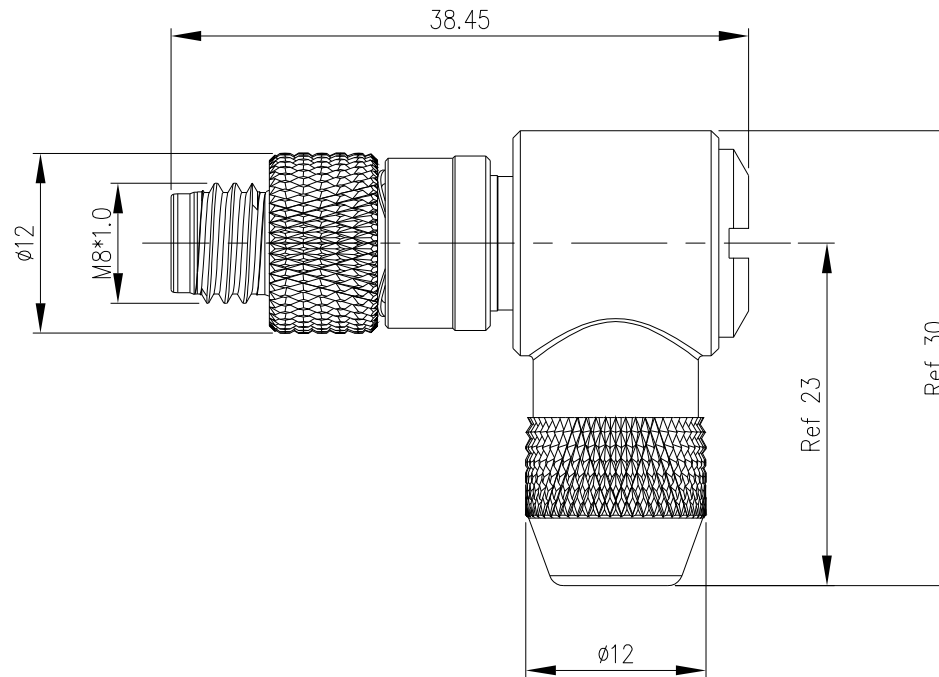




1. Rated voltage/Rated current:
3/4Pin:60V d.c./3A
5Pin:30V/3A
6/8Pin:30V/1.5A
2. Withstanding voltage:
3/4Pin:850V
5/6/8Pin:650V
3. Contact resistance : $\leq 3\text{m}\Omega$
4. Levels of protection: IP67
5. Operating temperature:-40 °C~+85 °C
6. Mechanical life: ≥ 100
7. RoHS Compliance
8. Tolerance:
 .X ± 0.3
 .XX ± 0.1
 Angles $\pm 1^\circ$

A: 组装式焊接(Solder)
S: 塑胶螺母组装式焊接
(Solder)
B: 组装式锁螺钉 (Screw)
W: 塑胶螺母组装式锁螺
钉 (Screw)

REV:1.0