
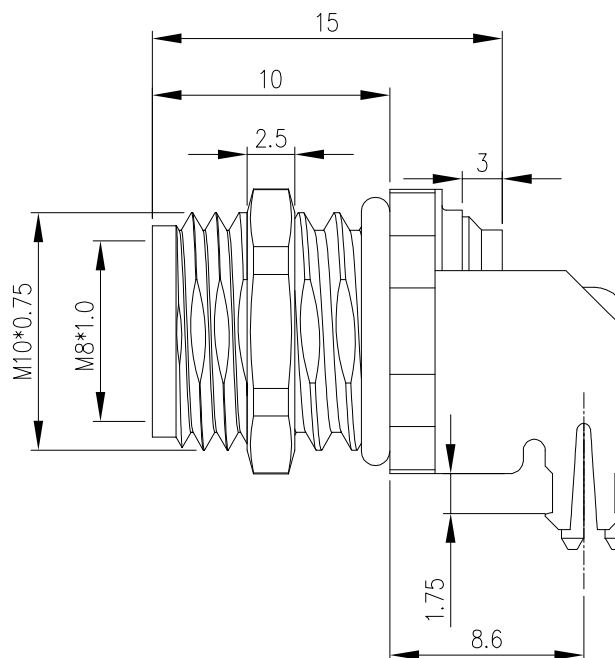


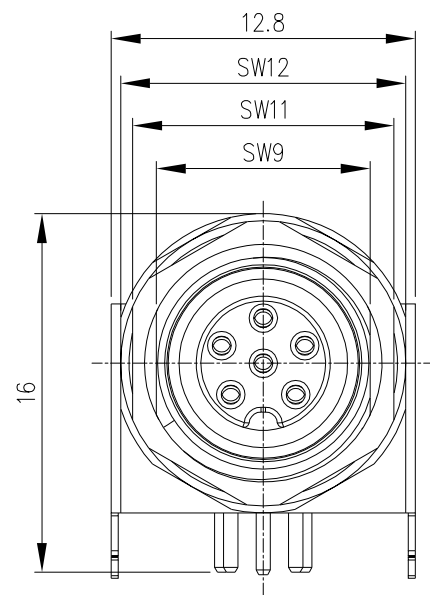

NOTES:

1. Rated voltage/Rated current:

3/4Pin: 60V d.c./3A

5Pin: 30V/3A

6/8Pin: 30V/1.5A

2. Withstanding voltage:

3/4Pin: 850V

5/6/8Pin: 650V

3. Contact resistance: $\leq 3m\Omega$

4. Levels of protection: IP67

5. Wire connection mode: soldering

6. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 7. Mechanical life: ≥ 100

8. RoHS Compliance

9. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$

ULO-CC02-M8X-XXP-FF-SRSH-SF001

Coding:
A: A-Coding
B: B-CodingPin: 03, 04
05, 06, 08

001: M10*0.75


002: M8*0.5

003: M8*1.0


004: M12*1.0

005: M8*1.0(plastic)


Panel cut




3Pin A coding




4Pin A coding




5Pin B coding








6Pin A coding



8Pin A coding



PCB layout



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.22	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			A4
	NAME		ULO-CC02-M8X-XXP-FF-SRSH-SF001		
	DWGNO				

NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司