
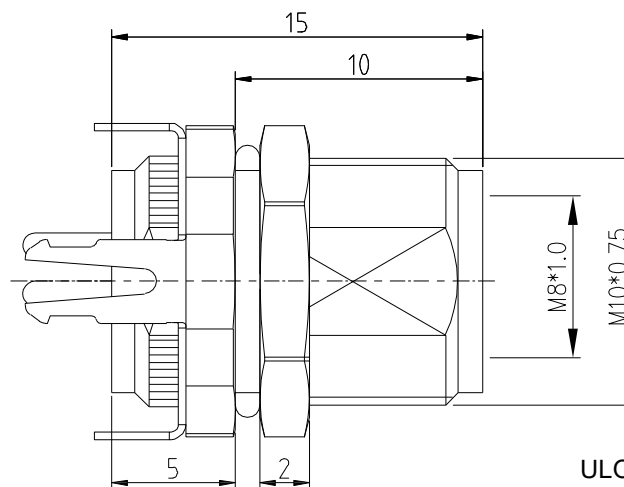


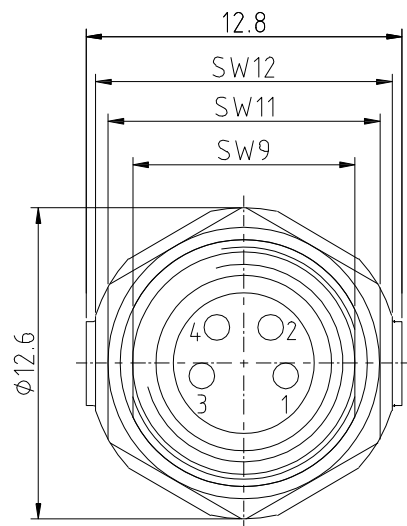

NOTES:

1. Rated voltage/Rated current:

3/4Pin: 60V d.c./3A

5Pin: 30V/3A

6/8Pin: 30V/1.5A

2. Withstanding voltage:

3/4Pin: 850V

5/6/8Pin: 650V

3. Contact resistance: $\leq 3m\Omega$

4. Levels of protection: IP67

5. Wire connection mode: soldering

6. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 7. Mechanical life: ≥ 100

8. RoHS Compliance


9. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$


ULO-CC02-M8X-XXP-FF-SPSH-SF001

Coding:
A: A-Coding
B: B-CodingPin: 03, 04
05, 06, 08001: M10*0.75
002: M8*0.5
003: M8*1.0
004: M12*1.0
005: M8*1.0(plastic)


Panel cut




3Pin A coding




4Pin A coding




5Pin B coding








6Pin A coding



8Pin A coding



PCB layout



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.22	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
	NINGBO ULO ELECTRONICS CO.,LTD.		NAME	ULO-CC02-M8X-XXP-FF-SPSH-SF001	
	宁波欧路电子有限公司		DWGNO		