
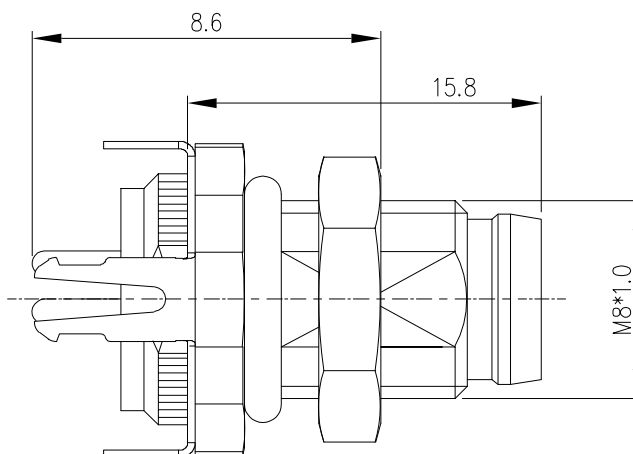


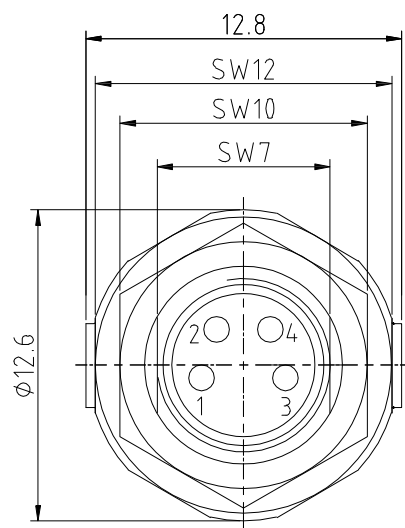

NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V/3A

6/8Pin:30V/1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance : $\leq 3m\Omega$

4.Levels of protection: IP67

5.Wire connection mode:soldering

6.Operating temperature:-40 °C~+85 °C

7.Mechanical life: ≥ 100

8.RoHS Compliance

9.Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$

ULO-CC02-M8X-XXP-MM-SPSH-SF003

Coding:
A:A-Coding
B:B-CodingPin: 03, 04
05, 06, 08

001:M10*0.75


002:M8*0.5

003:M8*1.0


004:M12*1.0

005:M8*1.0(plastic)


Panel cut




3Pin A coding




4Pin A coding




5Pin B coding








6Pin A coding



8Pin A coding



PCB layout



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE 23.12.18	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
	NINGBO ULO ELECTRONICS CO.,LTD.		NAME	ULO-CC02-M8X-XXP-MM-SPSH-SF003	
	宁波欧路电子有限公司		DWGNO		