

NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V/3A

6/8Pin:30V/1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance : $\leq 3\text{m}\Omega$



4.Levels of protection: IP67

5.Operating temperature:-40 °C~+85 °C

6.Mechanical life: ≥ 100

7.RoHS Compliance

8.Tolerance:

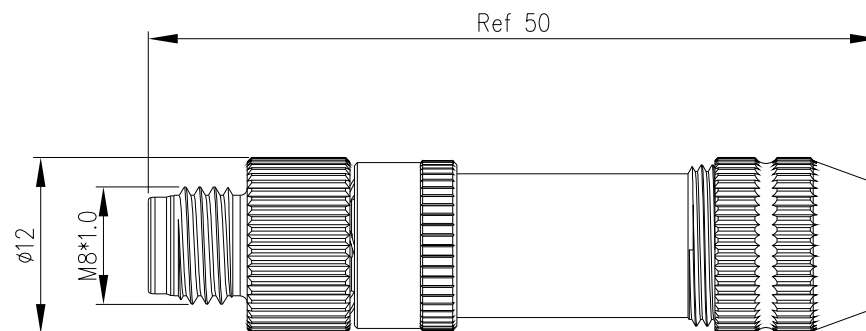.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$ 

ULO-CC02-M8X-XXP-MM-PXSH-SL001

Coding:

A:A-Coding

B:B-Coding

A: 组装式焊接(Solder)

S: 塑胶螺母组装式焊接(Solder)


B: 组装式锁螺钉 (Screw)

W: 塑胶螺母组装式锁螺钉 (Screw)


Pin: 03, 04

05, 06, 08


3Pin A coding




4Pin A coding




5Pin B coding



6Pin A coding



8Pin A coding



ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZM	DATE 24.1.23	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
				NAME	ULO-CC02-M8X-XXP-MM-PXSH-SL001
				DWGNO	



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司