

## NOTES:

1.Rated voltage/Rated current:

3/4Pin:60V d.c./3A

5Pin:30V/3A

6/8Pin:30V/1.5A

2.Withstanding voltage:

3/4Pin:850V

5/6/8Pin:650V

3.Contact resistance :  $\leq 3\text{m}\Omega$ 



4.Levels of protection: IP67

5.Operating temperature:-40 °C~+85 °C

6.Mechanical life:  $\geq 100$ 

7.RoHS Compliance

8.Tolerance:

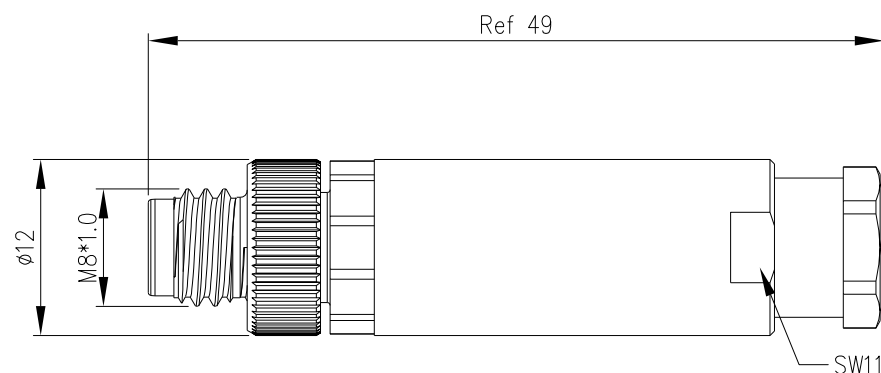.X  $\pm 0.3$ .XX  $\pm 0.1$ Angles  $\pm 1^\circ$ 

ULO-CC02-M8X-XXP-MM-PX-SL001

Coding:

A:A-Coding

B:B-Coding

Pin: 03, 04

05, 06, 08


A: 组装式焊接(Solder)

S: 塑胶螺母组装式焊接(Solder)


B: 组装式锁螺钉 (Screw)

W: 塑胶螺母组装式锁螺钉 (Screw)


3Pin A coding




4Pin A coding




5Pin B coding



6Pin A coding



8Pin A coding



| ITEM                            | NAME OF PART | NO. OF PART  | Q"TY  | MATERIAL                     | NOTE         |
|---------------------------------|--------------|--------------|-------|------------------------------|--------------|
| DWG.                            | LZM          | DATE 24.1.23 | UNITS | MM                           | SHEET/OF 1/1 |
| CHK.                            |              | DATE         | SCALE | 1:1                          | A4           |
| APP.                            |              | DATE         |       |                              |              |
| NINGBO ULO ELECTRONICS CO.,LTD. |              |              | NAME  | ULO-CC02-M8X-XXP-MM-PX-SL001 |              |
| 宁波欧路电子有限公司                      |              |              | DWGNO |                              |              |