
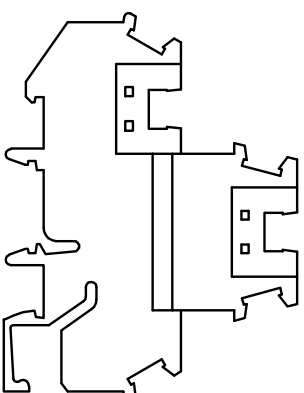


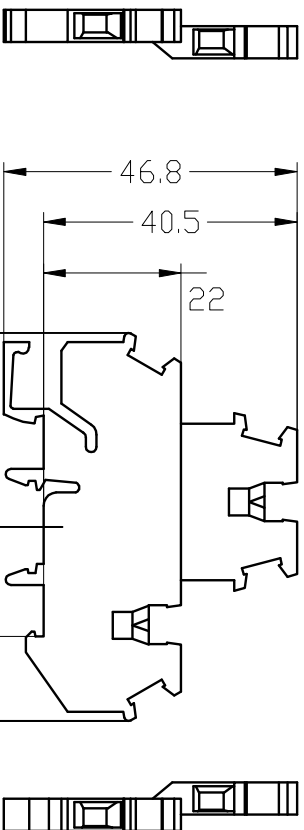

Technical data:

Product properties



1. Product type: Miniature terminal block
2. Number of connections: 4
3. Number of rows: 2
4. Potentials: 2

Electrical properties

1. Nominal voltage: 500V
2. Rated surge voltage: 6KV
3. Nominal current: 24A
4. Maximum load current: 24A
5. Nominal cross section: 2.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -50℃~+110℃

Connection data

1. Conductor cross section rigid: 0.2mm^2 – 4mm^2
2. Cross section AWG: 24–12
3. Conductor cross section flexible: 0.2mm^2 – 2.5mm^2
4. Conductor cross section, flexible AWG: 24–14
5. Stripping length: 7mm

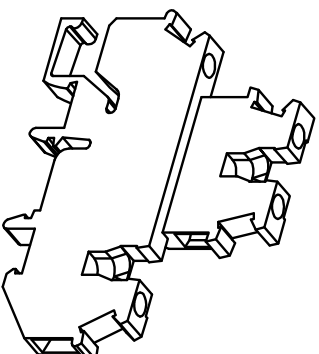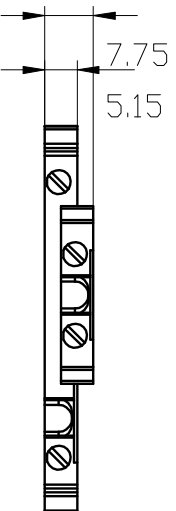

2	UL0-TB355-MBKB 2.5 BU	Blue
1	UL0-TB355-MBKB 2.5	Gray

A	Total Pitch Tolerances in mm	Nominal dimension range in mm	T	
			$\pm$	— //

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	MM	SHEET/OF 1/1
CHK.		DATE		SCALE 1 : 1	A4 
APP.		DATE		NAME	