

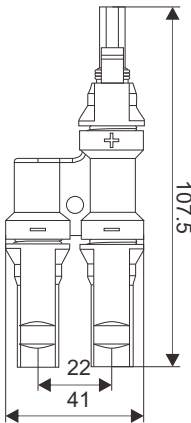
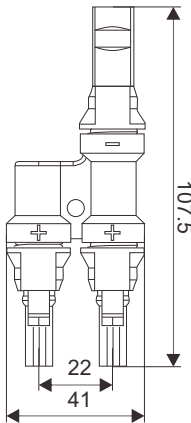




GSC4-T2 Branch Connector

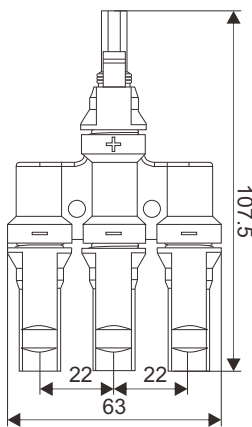



GSC4-T3

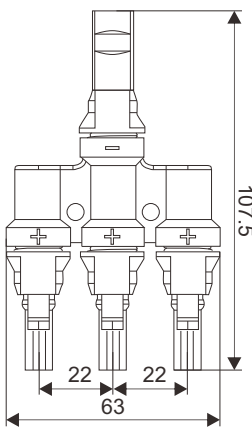



GSC4-T4

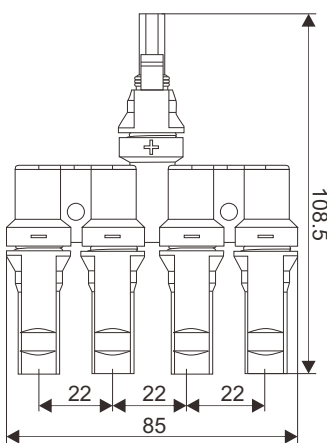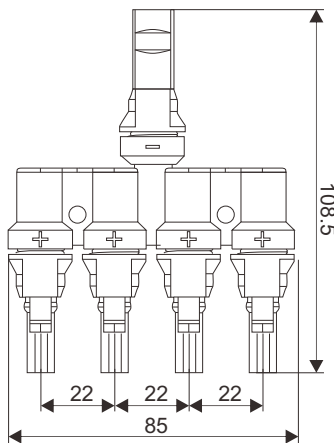

GSC4-T5

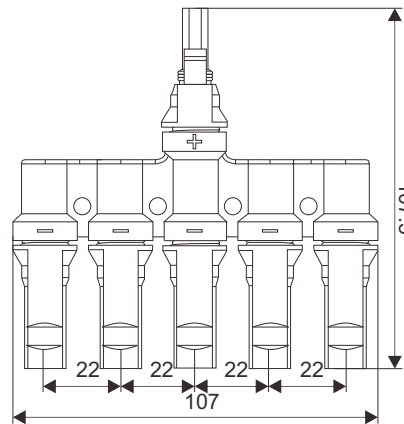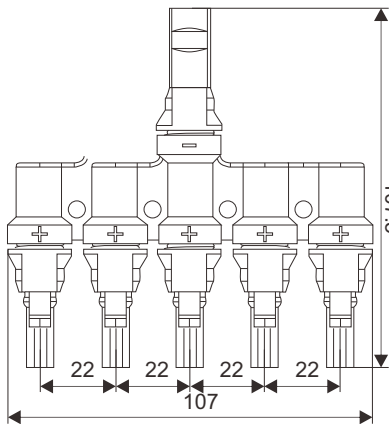

GSC4-T6

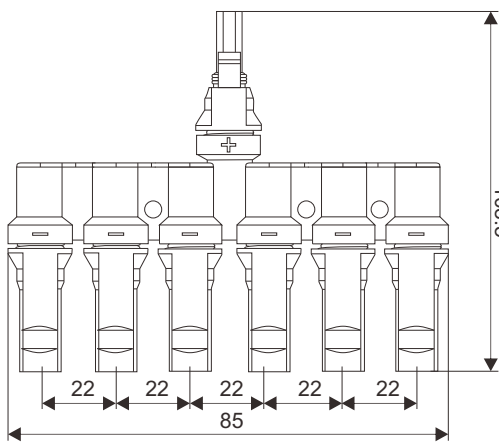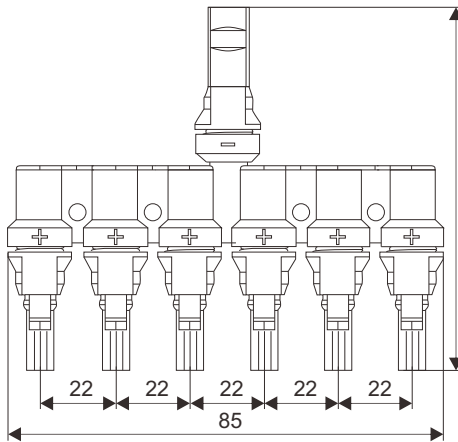

Data

Insulation Material	PPO
Contact Material	Copper, Tin plated
Suitable Current	30A
Rated Voltage	1000V(TUV) 600V(UL)
Test Voltage	6kV(TUV50HZ,1min)
Contact Resistance	<0.5mΩ
Degree Of Protection	IP67
Ambient Temperature Range	-40°C ~ +85°C
Flame Class	UL 94-V0
Safety Class	II
Pin Dimensions	Φ4mm