


Technical data	
Rated supply voltage hz	AC 220V/50–60Hz
Opeartion voltage range	AC 80V–350V
Overcurrent trip value	1–40A
Error	2%
>U and <Trip delay	0.5S
Reset/start delay	1–600S
Voltage measurement accuracy	1%
Rated insulation voltage	400V
Output contact	1NO
Electrical life	10 ⁵
Mechanical life	10 ⁶
Protection degree	IP20
Pollution degree	3
Altitude	≤2000m
Operatintg temperature	–50℃~55℃
Humidity	≤50%at40℃
Storage tamperature	–30℃~70℃

Default setting

Technical parameter	Seting range	Step	Factorysetting
Overcurrent trip value	1A – 40A	1A	5A
Reset/start delay	1s–600s	1s	5s
Current specification	40A		63A
Rated operating current(In ,A	40		63
Maximum operating current imax(A within 10min	45		80
Max.power of load (KW)	8.8		13.9

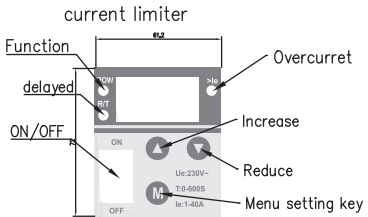

Function Setting

